


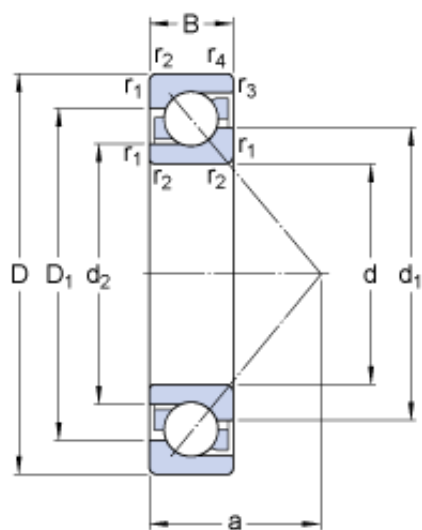

Bearing No. 7219 BECBM

a	72 mm
d	95 mm
D	170 mm
B	32 mm
Noun	Bearing
Bore	3.74 Inch 95 Millimeter
Width	1.26 Inch 32 Millimeter
UNSPSC	31171531
series:	72
Category	Angular Contact Ball Bearing
Enclosure	Open
Snap Ring	No
Size (mm)	170x95x32
Inventory	0.0
Width (mm)	32
Weight / LBS	6.511
maximum rpm:	4500 RPM
Flush Ground	Yes
Mass bearing	2.7 kg
Contact Angle	40 Degree
Cage Material	Brass
closure type:	Open
Product Group	B00308
Inch - Metric	Metric
d ₁	124.3 mm
D ₁	142.45 mm
d ₂	109.09 mm
Bearing number	7219 BECBM
bore diameter:	95 mm

Other Features	Normal Axial Internal Clearance
Keyword String	Angular Contact
cage material:	Brass
Limiting speed	4800 r/min
overall width:	32 mm
contact angle:	40 °
fillet radius:	2 mm
Reference speed	4800 r/min
finish/coating:	Uncoated
Rolling Element	Ball Bearing
Precision Class	ABEC 3 ISO P6
Long Description	95MM Bore; 170MM Outside Diameter; 32MM Width; Open; Yes Flush Ground; Ball Bearing; Single Row of Balls; ABEC 3 ISO P6; No Filling Slot; No Snap Ring
Manufacturer URL	http://www.skf.com
Outside Diameter	6.693 Inch 170 Millimeter
precision rating:	ABEC 3 (ISO Class 6)
outer ring width:	32 mm
Manufacturer Name	SKF
outside diameter:	170 mm
Weight / Kilogram	2.96
r _b max.	1 mm
Bore Diameter (mm)	170
D _a max.	158 mm
D _b max.	163 mm
r _a max.	2 mm
d _a min.	107 mm
Internal Clearance	CB

Number of Bearings	1 (Single)
internal clearance:	C0
Outer Diameter (mm)	95
Calculation factor A	0.191
d_a - min.	107 mm
r_a - max.	2 mm
D_b - max.	163 mm
Mounting Arrangement	Universal
Minimum Buy Quantity	N/A
$r_{1,2}$ min.	2.1 mm
D_a - max.	158 mm
$r_{3,4}$ min.	1.1 mm
Calculation factor X	0.57
Calculation factor e	1.14
r_b - max.	1 mm
D_1 ?	142.45 mm
d_2 ?	109.09 mm
d_1 ?	124.3 mm
row type & fill slot:	Single-Row Non-Fill Slot
Calculation factor - X	0.35
Calculation factor - e	1.14
$r_{1,2}$ - min.	2.1 mm
Harmonized Tariff Code	8482.10.50.28
$r_{3,4}$ - min.	1.1 mm
Number of Rows of Balls	Single Row
Manufacturer Item Number	7219 BECBM
Basic dynamic load rating C	129 kN
radial static load capacity:	108 kN
Basic dynamic load rating - C	129 kN

radial dynamic load capacity:	124 kN
Maximum Capacity / Filling Slot	No
Calculation factor k_r	0.095
Calculation factor Y_1	0.55
Calculation factor Y_2	0.93
Calculation factor Y_0	0.52
Fatigue load limit P_u	4.4 kN
Calculation factor - Y_2	0.57
Calculation factor - k_r	0.095
Calculation factor - Y_0	0.26
Calculation factor - Y_1	
Fatigue load limit - P_u	4.4 kN
Calculation factor - k_a	1.4
Basic static load rating C_0	118 kN
Basic static load rating - C_0	118 kN