


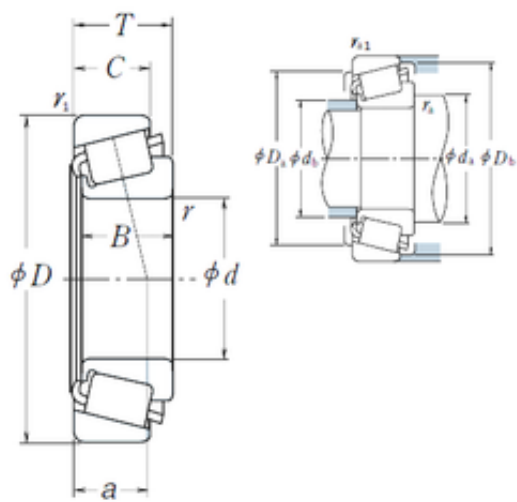

Bearing No. 47890/47820

e	0.45
d	92,075 mm
D	146,05 mm
T	33,338 mm
B	34,925 mm
C	26,195 mm
a	32,3 mm
Da	131 mm
B_	34.925
Db	140 mm
da	107 mm
Y0	0.74
db	101 mm
C0	280
D_	146.05
Z_	27
C_	26.195
Y1	1.3
DE_	130.91
SLR	24
D_a	131
DI_	108.227
DA1	11.889
DA2	10.706
CUP	0.664
DA_	11.627
D_b	140
RAr	240.456
SDM_	119.549
KBRG	3161

yobi	47890/47820
CONE	1.46
ALP21	33
ALP22	16
ALP23	0
BETA_	1
BET21	2
BET23	0
BET22	50
r min.	3,5 mm
LangID	1
Weight	2,124 Kg
ALPHA_	16.633
r1 min.	3,3 mm
ra max.	3,5 mm
Oil rpm	3200
outer r	3.3
hidYobi	47890/47820
GRS rpm	2400
inner r	3.5
hidTable	ecat_NSTPRI
inner ra	3.5
outer rb	3.3
ra1 max.	3,3 mm
Size (mm)	92.075x146.05x33.338
SHOG_yobi	47890/47820
Prod_Type3	TRBSR_ID_A
Width (mm)	33,338
Bearing number	47890/47820
Bore Diameter (mm)	92,075
Outer Diameter (mm)	146,05
Calculation factor (e)	0,45

(Oil) Lubrication Speed	3200 r/min
Calculation factor (Y0)	0,74
(Grease) Lubrication Speed	2400 r/min
Basic static load rating (C0)	280 kN
Basic dynamic load rating (C)	169 kN