


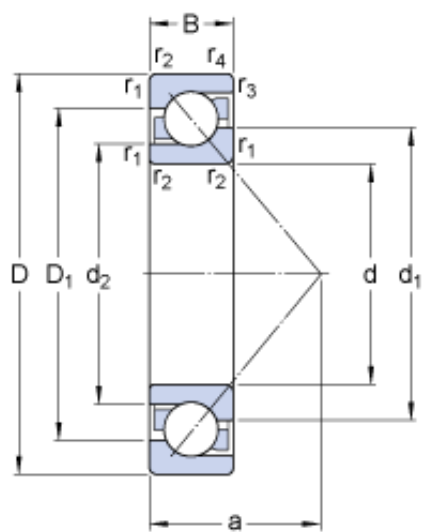

Bearing No. 7220 BECBM

a	76 mm
d	100 mm
D	180 mm
B	34 mm
Noun	Bearing
Bore	3.937 Inch 100 Millimeter
Width	1.339 Inch 34 Millimeter
UNSPSC	31171531
series:	72
Category	Angular Contact Ball Bearing
Enclosure	Open
Snap Ring	No
Size (mm)	180x100x34
Inventory	0.0
Width (mm)	34
Weight / LBS	7.959
maximum rpm:	4500 RPM
Flush Ground	Yes
Mass bearing	3.3 kg
Contact Angle	40 Degree
Cage Material	Brass
closure type:	Open
Product Group	B00308
Inch - Metric	Metric
d ₂	115.22 mm
d ₁	130.95 mm
D ₁	150.9 mm

Other Features	Normal Axial Internal Clearance
fillet radius:	2 mm
contact angle:	40 °
overall width:	34 mm
cage material:	Brass
bore diameter:	100 mm
Keyword String	Angular Contact
Bearing number	7220 BECBM
Limiting speed	4500 r/min
finish/coating:	Uncoated
Rolling Element	Ball Bearing
Precision Class	ABEC 3 ISO P6
Reference speed	4500 r/min
Long Description	100MM Bore; 180MM Outside Diameter; 34MM Width; Open; Yes Flush Ground; Ball Bearing; Single Row of Balls; ABEC 3 ISO P6; No Filling Slot; No Snap Ring
Outside Diameter	7.087 Inch 180 Millimeter
Manufacturer URL	http://www.skf.com
Weight / Kilogram	3.61
precision rating:	ABEC 3 (ISO Class 6)
outside diameter:	180 mm
Manufacturer Name	SKF
outer ring width:	34 mm
d _a min.	112 mm
Number of Bearings	1 (Single)
Bore Diameter (mm)	180
r _b max.	1 mm
r _a max.	2 mm

Internal Clearance	CB
D _b max.	173 mm
D _a max.	168 mm
internal clearance:	C0
Outer Diameter (mm)	100
r _{1,2} min.	2.1 mm
Calculation factor A	0.239
Calculation factor e	1.14
Calculation factor X	0.57
Mounting Arrangement	Universal
r _{3,4} min.	1.1 mm
r _b - max.	1 mm
r _a - max.	2 mm
D _b - max.	173 mm
d _a - min.	112 mm
Minimum Buy Quantity	N/A
D _a - max.	168 mm
D ₁ ?	150.9 mm
d ₂ ?	115.22 mm
d ₁ ?	130.95 mm
row type & fill slot:	Single-Row Non-Fill Slot
Calculation factor - X	0.35
Calculation factor - e	1.14
r _{1,2} - min.	2.1 mm
r _{3,4} - min.	1.1 mm
Harmonized Tariff Code	8482.10.50.28
Number of Rows of Balls	Single Row
Manufacturer Item Number	7220 BECBM
Basic dynamic load rating C	143 kN
radial static load capacity:	134 kN

radial dynamic load capacity:	143 kN
Basic dynamic load rating - C	143 kN
Maximum Capacity / Filling Slot	No
Calculation factor Y_0	0.52
Calculation factor Y_2	0.93
Calculation factor Y_1	0.55
Calculation factor k_r	0.095
Fatigue load limit P_u	4.75 kN
Calculation factor - k_r	0.095
Calculation factor - Y_0	0.26
Fatigue load limit - P_u	4.8 kN
Calculation factor - Y_1	
Calculation factor - Y_2	0.57
Calculation factor - k_a	1.4
Basic static load rating C_0	134 kN
Basic static load rating - C_0	134 kN