


Bearing No. 30TAB06DB-2NK

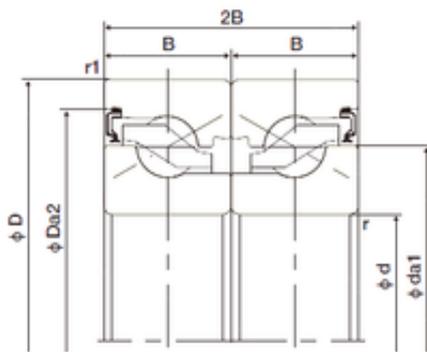

D	62 mm
d	30 mm
B	15 mm
C	15 mm
r1	0.6 mm
2B	30 mm
da2	39.7 mm
da1	46.2 mm
Da2	54.9 mm
Da1	47.5 mm
Width	15 mm
r min.	1 mm
Weight	0.21 Kg
r1 min.	0.6 mm
Bore Type	Cylindrical Bore
Bore Size	30 mm
Enclosure	Double Seal
Size (mm)	30x62x15
Width (mm)	15
Configuration	Double Row
Bearing number	30TAB06DB-2NK
Angle (?)	60 °
Outside Diameter	62 mm
Static Load Rating	10,400 N
Bore Diameter (mm)	30
Dynamic Load Rating	6,700 N
Outer Diameter (mm)	62
Limiting Speed - Oil	3,250 rpm
Fillet Radius/Chamfer	1 mm
Basic static load rating	46,4 kN

(C0)	
Basic dynamic load rating (C)	29,9 kN
Starting Torque - Grease Lubrication	20 N·cm