


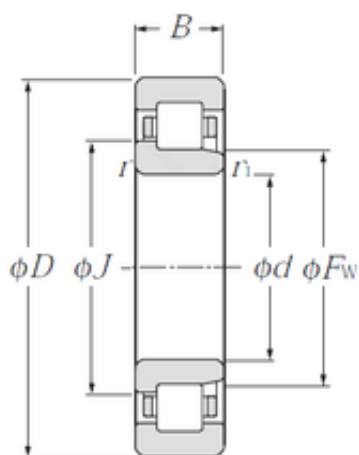

Bearing No. NJ222

F	132.5 mm
d	110 mm
D	200 mm
B	38 mm
C	38 mm
E	178.5 mm
J	141,5 mm
d1	141.5 mm
Fw	132,5 mm
Noun	Bearing
Bore	4.331 Inch 110 Millimeter
Width	1.496 Inch 38 Millimeter
ra max	2 mm
rs min	2.1 mm
da min	121 mm
da max	130 mm
Weight	4,63 Kg
r min.	2,1 mm
dc min	144 mm
Da max	189 mm
UNSPSC	31171547
Profile	Complete with Outer and Inner Ring
r1s min	2.1 mm
r1 min.	2,1 mm
Retainer	Yes
Category	Cylindrical Roller Bearing
Separable	Inner Ring - One Side

Inventory	0.0
Snap Ring	No
Size (mm)	110x200x38
Width (mm)	38
bore type:	Straight
Nlim (oil)	4,000 rpm
Bore Profile	Straight
Weight / LBS	10.608
Nlim (grease)	3,400 rpm
Inch - Metric	Metric
Cage Material	Steel
Product Group	B04144
bore diameter:	110 mm
Other Features	1 Rib Inner Ring 2 Rib Outer Ring Cage On Outer Ring ID
Relubricatable	Yes
Bearing number	NJ222
overall width:	38 mm
Static load, C0	290 kN
Rolling Element	Cylindrical Roller Bearing
Precision Class	RBEC 1 ISO P0
Dynamic load, C	240 kN
Outside Diameter	7.874 Inch 200 Millimeter
Manufacturer URL	http://www.ntnamerica.com
Long Description	110MM Bore; Straight Bore Profile; 200MM Outside Diameter; 38MM Width; Steel Cage Material; RBEC 1 ISO P0; Single Row; Inner Ring - One Side Separable; No Snap

	Ring; Relubricatable; C0-Medium Inter
outside diameter:	200 mm
Weight / Kilogram	4.82
Manufacturer Name	NTN
Internal Clearance	C0-Medium
Bore Diameter (mm)	110
Outer Diameter (mm)	200
Minimum Buy Quantity	N/A
Fatigue limit load, Cu	31 kN
Mass (without HJ ring)	4.96 kg
Radial clearance class	CN
Harmonized Tariff Code	8482.50.00.00
Manufacturer Item Number	NJ222
manufacturer upc number:	4547359119725
Number of Rows of Rollers	Single Row
(Grease) Lubrication Speed	3 400 r/min
Basic static load rating (C0)	290 kN
Basic dynamic load rating (C)	240 kN
Min operating temperature, Tmin	-40 °C
Max operating temperature, Tmax	120 °C