


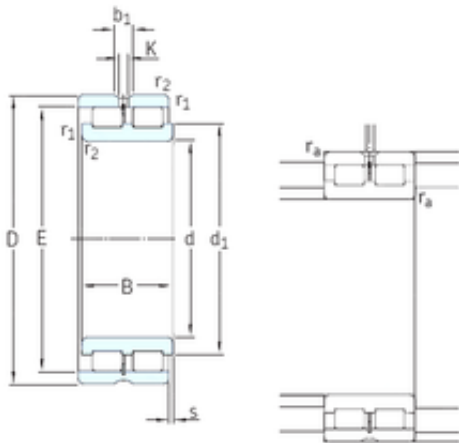

Bearing No. NNCL4968CV

|                               |             |
|-------------------------------|-------------|
| S                             | 6 mm        |
| d                             | 340 mm      |
| D                             | 460 mm      |
| B                             | 118 mm      |
| C                             | 118 mm      |
| K                             | 5 mm        |
| E                             | 430,11 mm   |
| d1                            | 385 mm      |
| D1                            | – mm        |
| b1                            | 9,4 mm      |
| Weight                        | 58 Kg       |
| ba min.                       | 356 mm      |
| r4 min.                       | – mm        |
| r3 min.                       | – mm        |
| r2 min.                       | 3 mm        |
| r1 min.                       | 3 mm        |
| ra max.                       | 2,5 mm      |
| Da max.                       | 445 mm      |
| Size (mm)                     | 340x460x118 |
| Width (mm)                    | 118         |
| Bearing number                | NNCL4968CV  |
| Limiting speed                | 700 r/min   |
| Reference speed               | 560 r/min   |
| Bore Diameter (mm)            | 340         |
| Outer Diameter (mm)           | 460         |
| Fatigue load limit (Pu)       | 390         |
| Basic dynamic load rating (C) | 1790 kN     |
| Basic static load rating (C0) | 4250 kN     |