


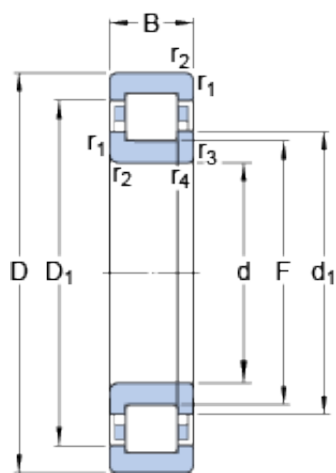

Bearing No. NUP 226 ECP

D	230 mm
d	130 mm
B	40 mm
F	153.5 mm
Noun	Bearing
Bore	5.118 Inch 130 Millimeter
Width	1.575 Inch 40 Millimeter
UNSPSC	31171547
Profile	Complete with Outer and Inner Ring
Retainer	Yes
Category	Cylindrical Roller Bearing
Size (mm)	230x130x40
Separable	No
Snap Ring	No
Inventory	0.0
Width (mm)	40
Weight / LBS	15.02
Bore Profile	Straight
Mass bearing	6.72 kg
D ₁	200.3 mm
Product Group	B04144
Inch - Metric	Metric
d ₁	164 mm
Cage Material	Polymer
Other Features	High Capacity 1 Rib Inner Ring with Side Plate 2 Rib Outer Ring Cage on Outer Ring ID

Relubricatable	Yes
Bearing number	NUP 226 ECP
Limiting speed	3400 r/min
Reference speed	3200 r/min
Precision Class	RBEC 1 ISO P0
Rolling Element	Cylindrical Roller Bearing
Limiting value e	0.2
Manufacturer URL	http://www.skf.com
Long Description	130MM Bore; Straight Bore Profile; 230MM Outside Diameter; 40MM Width; Polymer Cage Material; RBEC 1 ISO P0; Single Row; Not Separable; No Snap Ring; Relubricatable; C0-Medium Internal Clearance; R
Outside Diameter	9.055 Inch 230 Millimeter
Weight / Kilogram	6.82
Manufacturer Name	SKF
d _a min.	144 mm
D _a max.	215.4 mm
d _b min.	167 mm
Internal Clearance	C0-Medium
r _a max.	2.5 mm
Bore Diameter (mm)	230
Axial load factor Y	0.6
Outer Diameter (mm)	130
r _{3,4} min.	3 mm
d _a - min.	144 mm
r _{1,2} min.	3 mm
d _b - min.	167 mm
	215.4 mm

Da - max.	
-----------	--

r_a - max.	2.5 mm
Minimum Buy Quantity	N/A
d_1 ?	164 mm
D_1 ?	200.3 mm
$r_{1,2}$ - min.	3 mm
Harmonized Tariff Code	8482.50.00.00
$r_{3,4}$ - min.	3 mm
Manufacturer Item Number	NUP 226 ECP
Number of Rows of Rollers	Single Row
Basic dynamic load rating C	415 kN
Basic dynamic load rating - C	415 kN
Fatigue load limit P_u	51 kN
Calculation factor k_r	0.15
Calculation factor - k_r	0.15
Fatigue load limit - P_u	51 kN
Basic static load rating C_0	455 kN
Basic static load rating - C_0	455 kN