


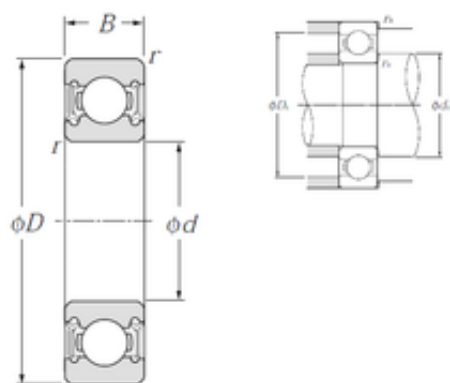

Bearing No. 6222LLU

C	38 mm
d	110 mm
D	200 mm
B	38 mm
Bore	4.331 Inch 110 Millimeter
Noun	Bearing
Weight	4,36 Kg
r min.	2,1 mm
da max	132 mm
UNSPSC	31171504
da min.	121 mm
Da max.	189 mm
ra max.	2 mm
Category	Single Row Ball Bearing
Size (mm)	110x200x38
Snap Ring	No
Inventory	0.0
Enclosure	2 Seals
Width (mm)	38
bore type:	Round
Weight / LBS	9.61
Inch - Metric	Metric
closure type:	Double Sealed
Product Group	B00308
Cage Material	Steel
bore diameter:	110 mm
Keyword String	Ball
overall width:	38 mm
cage material:	Steel

fillet radius:	2.1 mm
Other Features	Deep Groove Double Lip Friction Nitrile Rubber Seal -20 To 120 Deg C Shell Alvania Prelubricated
Bearing number	6222LLU
Enclosure Type	Contact Seal
Rolling Element	Ball Bearing
finish/coating:	Uncoated
Precision Class	ABEC 1 ISO P0
Reference speed	2 200 r/min
Outside Diameter	7.874 Inch 200 Millimeter
Long Description	110MM Bore; 200MM Outside Diameter; 38MM Outer Race Width; 2 Seals; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Steel Cage
Manufacturer URL	http://www.ntnamerica.com
Outer Race Width	1.496 Inch 38 Millimeter
Inner Race Width	0 Inch 0 Millimeter
outside diameter:	200 mm
Manufacturer Name	NTN
precision rating:	ISO Class 0
bearing material:	High Carbon Chrome Steel
inner ring width:	38 mm
outer ring width:	38 mm
Weight / Kilogram	0

Bore Diameter (mm)	110
Internal Clearance	C0-Medium
Outer Diameter (mm)	200
snap ring included:	Without Snap Ring
internal clearance:	CN
Minimum Buy Quantity	N/A
static load capacity:	117000 N
row type & fill slot:	Single Row Non-Fill Slot
maximum rpm (grease):	2200 rpm
Harmonized Tariff Code	8482.10.50.68
dynamic load capacity:	144000 N
Internal Special Features	No
manufacturer product page:	Click here
operating temperature range:	-40 to 120 °C
Basic static load rating (C0)	117 kN
Basic dynamic load rating (C)	144 kN
Maximum Capacity / Filling Slot	No