


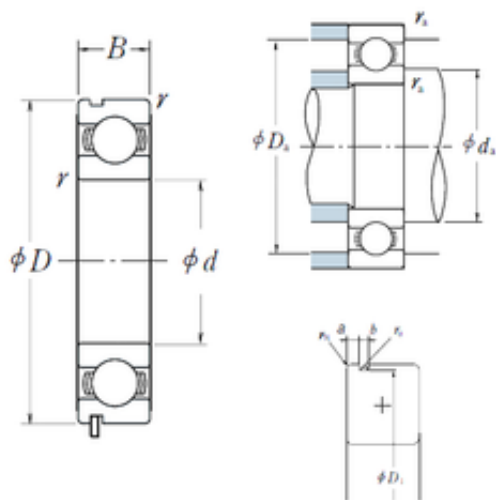

Bearing No. 6222N

a	5,69 mm
r	2.1
d	110 mm
D	200 mm
B	38 mm
C	38 mm
b	3,5 mm
fo	14.3
B_	38
ra	2
C0	117
D1	193,65 mm
D_	200
Z_	10
rn	0,5 mm
ro	0.6
DE_	183.575
SRI	14.79
D_a	189
DA_	28.575
SRE	14.79
DI_	126.425
yobi	6222N
mass	4.45
SBRG	2
bomp	0
KBRG	6101
SREX	0.05
SREN	-0.05
SRIN	-0.05

SDM_	155
SRIX	0.05
ALPHA_	0
r min.	2,1 mm
C_conv	144000
da max	134 mm
da min	121
Weight	4,45 Kg
LangID	1
ra max.	2 mm
Da max.	189 mm
Oil rpm	3400
da min.	121 mm
r0 max.	0,6 mm
hidYobi	6222N
GRS rpm	2800
hidTable	ecat_NSRDGB
Size (mm)	110x200x38
Prod_Type3	DGBB_SR_N_OT
Width (mm)	38
Bearing number	6222N
Bore Diameter (mm)	110
Outer Diameter (mm)	200
(Oil) Lubrication Speed	3 400 r/min
(Grease) Lubrication Speed	2 800 r/min
Basic dynamic load rating (C)	144 kN
Basic static load rating (C0)	117 kN