


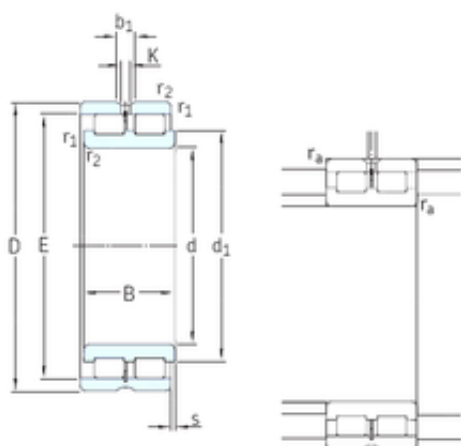

Bearing No. NNCL4932CV

|                               |            |
|-------------------------------|------------|
| S                             | 4 mm       |
| d                             | 160 mm     |
| D                             | 220 mm     |
| B                             | 60 mm      |
| C                             | 60 mm      |
| K                             | 4 mm       |
| E                             | 206,16 mm  |
| d1                            | 184 mm     |
| D1                            | – mm       |
| b1                            | 7 mm       |
| Weight                        | 6,8 Kg     |
| ba min.                       | 170 mm     |
| r4 min.                       | – mm       |
| r3 min.                       | – mm       |
| r2 min.                       | 2 mm       |
| r1 min.                       | 2 mm       |
| ra max.                       | 2 mm       |
| Da max.                       | 211 mm     |
| Size (mm)                     | 160x220x60 |
| Width (mm)                    | 60         |
| Bearing number                | NNCL4932CV |
| Limiting speed                | 1600 r/min |
| Reference speed               | 1300 r/min |
| Bore Diameter (mm)            | 160        |
| Outer Diameter (mm)           | 220        |
| Fatigue load limit (Pu)       | 96,5       |
| Basic dynamic load rating (C) | 446 kN     |
| Basic static load rating (C0) | 915 kN     |