


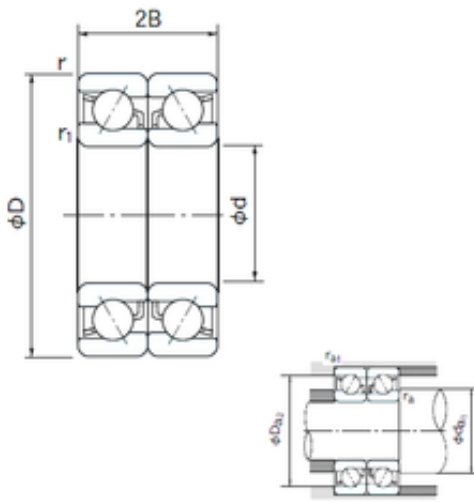

Bearing No. 7304BDB

D	52 mm
a	7.6 mm
C	15 mm
B	15 mm
d	20 mm
r1	0.6 mm
2B	30 mm
Width	15 mm
r min.	1.1 mm
Weight	0.150 Kg
ra max.	0.6 mm
r1 min.	0.6 mm
da min.	25 mm
Da max.	47 mm
ra (max)	1 mm
da1 (min)	27 mm
Bore Size	20 mm
Enclosure	Open
Bore Type	Cylindrical Bore
ra1 (max)	0.6 mm
Size (mm)	20x52x15
da2 (min)	25 mm
Da2 (max)	47 mm
Da1 (max)	45 mm
Width (mm)	15
Configuration	Duplex
Bearing number	7304BDB
Angle (?)	40 °
Outside Diameter	52 mm
Static Load Rating	19,800 N

Bore Diameter (mm)	20
Dynamic Load Rating	28,900 N
Outer Diameter (mm)	52
Limiting Speed - Oil	12,000 rpm
Fillet Radius/Chamfer	1.1 mm
Limiting Speed - Grease	9,000 rpm
(Grease) Lubrication Speed	9000 r/min
Basic dynamic load rating (C)	28,9 kN
Basic static load rating (C0)	19,8 kN