


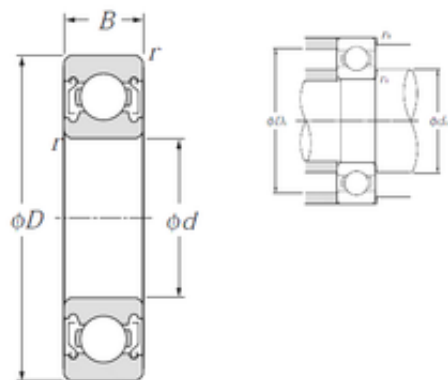

Bearing No. 6222ZZ

D	200 mm
d	110 mm
B	38 mm
C	38 mm
rn	0,5 mm
Noun	Bearing
Bore	4.331 Inch 110 Millimeter
UNSPSC	31171504
da max	132 mm
Weight	4,36 Kg
r min.	2,1 mm
da min.	121 mm
Da max.	189 mm
ra max.	2 mm
series:	62
Category	Single Row Ball Bearing
Enclosure	2 Metal Shields
Size (mm)	110x200x38
Inventory	0.0
Snap Ring	No
Width (mm)	38
bore type:	Round
Weight / LBS	8.5098
maximum rpm:	3800 RPM
closure type:	Double Shielded
Product Group	B00308
Inch - Metric	Metric
Cage Material	Steel
Keyword String	Ball

Other Features	Deep Groove Shell Alvania Prelubricated
Bearing number	6222ZZ
bore diameter:	110 mm
overall width:	38 mm
cage material:	Steel
fillet radius:	2.1 mm
Rolling Element	Ball Bearing
Precision Class	ABEC 1 ISO P0
finish/coating:	Uncoated
Outside Diameter	7.874 Inch 200 Millimeter
Outer Race Width	1.496 Inch 38 Millimeter
Inner Race Width	0 Inch 0 Millimeter
Long Description	110MM Bore; 200MM Outside Diameter; 38MM Outer Race Width; 2 Metal Shields; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; St
Manufacturer URL	http://www.ntnamerica.com
Weight / Kilogram	0
outer ring width:	38 mm
Manufacturer Name	NTN
bearing material:	High Carbon Chrome Steel
inner ring width:	38 mm
outside diameter:	200 mm
precision rating:	ISO Class 0
Internal Clearance	C0-Medium

Bore Diameter (mm)	110
Outer Diameter (mm)	200
internal clearance:	CN
snap ring included:	Without Snap Ring
Minimum Buy Quantity	N/A
row type & fill slot:	Single Row Non-Fill Slot
maximum rpm (grease):	3200 rpm
static load capacity:	117000 N
Harmonized Tariff Code	8482.10.50.68
dynamic load capacity:	144000 N
Internal Special Features	No
(Grease) Lubrication Speed	3 200 r/min
manufacturer product page:	Click here
operating temperature range:	-40 to 120 °C
Basic static load rating (C0)	117 kN
Basic dynamic load rating (C)	144 kN
Maximum Capacity / Filling Slot	No