


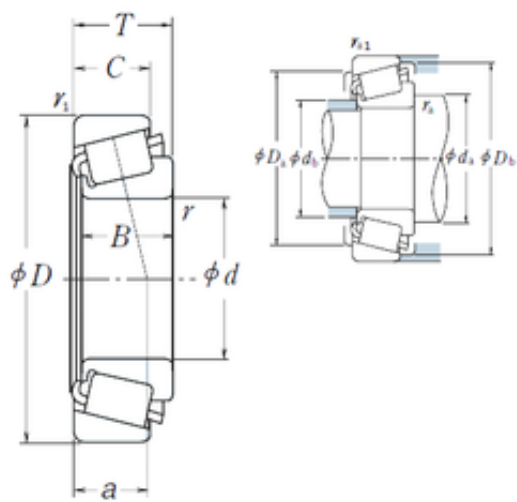

Bearing No. 48685/48620

e	0.34
d	142,875 mm
D	200,025 mm
T	41,275 mm
B	39,688 mm
C	34,13 mm
a	37,6 mm
Da	185 mm
B_	39.688
Db	193 mm
da	158 mm
Y0	0.98
db	151 mm
C0	460
D_	200.025
Z_	34
C_	34.13
Y1	1.8
DE_	185.161
SLR	30
D_a	185
DI_	162.134
DA1	12.075
DA2	11.247
CUP	1.19
DA_	11.661
D_b	193
RAr	436.962
SDM_	173.66
KBRG	3161

yobi	48685/48620
CONE	2.63
ALP21	25
ALP22	20
ALP23	0
BETA_	0
BET21	1
BET23	0
BET22	35
r min.	3,5 mm
LangID	1
Weight	3,82 Kg
ALPHA_	12.667
r1 min.	3,3 mm
ra max.	3,5 mm
Oil rpm	2200
outer r	3.3
hidYobi	48685/48620
GRS rpm	1600
inner r	3.5
hidTable	ecat_NSTPRI
inner ra	3.5
outer rb	3.3
ra1 max.	3,3 mm
Size (mm)	142.875x200.025x41.27 5
SHOG_yobi	48685/48620
Prod_Type3	TRBSR_ID_A
Width (mm)	41,275
Bearing number	48685/48620
Bore Diameter (mm)	142,875
Outer Diameter (mm)	200,025
Calculation factor (e)	0,34

(Oil) Lubrication Speed	2200 r/min
Calculation factor (Y0)	0,98
(Grease) Lubrication Speed	1600 r/min
Basic static load rating (C0)	460 kN
Basic dynamic load rating (C)	227 kN