


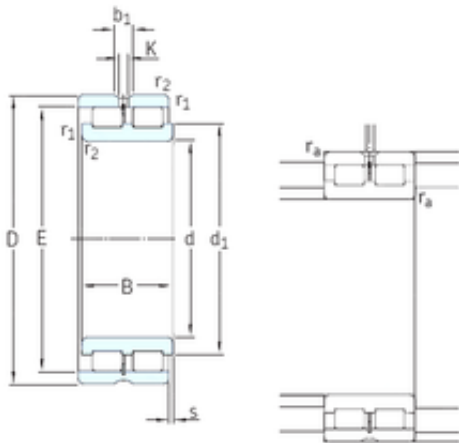

Bearing No. NNCL4922CV

S	2 mm
d	110 mm
D	150 mm
B	40 mm
C	40 mm
K	3,5 mm
E	138,2 mm
d1	125 mm
D1	– mm
b1	6 mm
Weight	2,1 Kg
ba min.	116 mm
r4 min.	– mm
r3 min.	– mm
r2 min.	1,1 mm
r1 min.	1,1 mm
ra max.	1 mm
Da max.	144 mm
Size (mm)	110x150x40
Width (mm)	40
Bearing number	NNCL4922CV
Limiting speed	2400 r/min
Reference speed	1900 r/min
Bore Diameter (mm)	110
Outer Diameter (mm)	150
Fatigue load limit (Pu)	49
Basic dynamic load rating (C)	220 kN
Basic static load rating (C0)	430 kN