


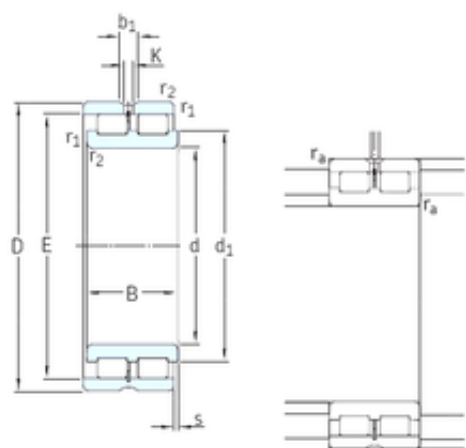

Bearing No. NNCL4880CV

S	6 mm
d	400 mm
D	500 mm
B	100 mm
C	100 mm
K	5 mm
E	470,59 mm
d1	434 mm
D1	– mm
b1	9,4 mm
Weight	46 Kg
ba min.	411 mm
r4 min.	– mm
r3 min.	– mm
r2 min.	2,1 mm
r1 min.	2,1 mm
ra max.	2 mm
Da max.	488 mm
Size (mm)	400x500x100
Width (mm)	100
Bearing number	NNCL4880CV
Limiting speed	630 r/min
Reference speed	500 r/min
Bore Diameter (mm)	400
Outer Diameter (mm)	500
Fatigue load limit (Pu)	325
Basic dynamic load rating (C)	1420 kN
Basic static load rating (C0)	3750 kN