


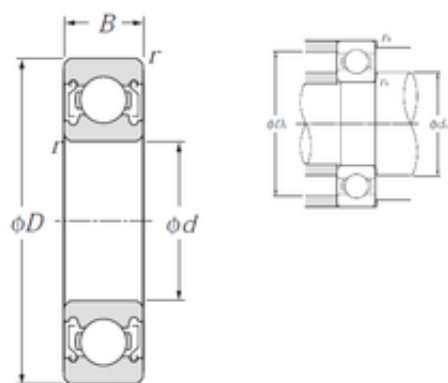

Bearing No. 6224ZZ

C	40 mm
d	120 mm
D	215 mm
B	40 mm
Bore	4.724 Inch 120 Millimeter
Noun	Bearing
Weight	5,15 Kg
da max	143 mm
r min.	2,1 mm
UNSPSC	31171504
da min.	131 mm
Da max.	204 mm
ra max.	2 mm
series:	62
Category	Single Row Ball Bearing
Inventory	0.0
Size (mm)	120x215x40
Snap Ring	No
Enclosure	2 Metal Shields
bore type:	Round
Width (mm)	40
Weight / LBS	12.3459
maximum rpm:	34000 RPM
closure type:	Double Shielded
Inch - Metric	Metric
Cage Material	Steel
Product Group	B00308
bore diameter:	120 mm
overall width:	40 mm

cage material:	Steel
fillet radius:	2.1 mm
Other Features	Deep Groove Shell Alvania Prelubricated
Keyword String	Ball
Bearing number	6224ZZ
Rolling Element	Ball Bearing
Precision Class	ABEC 1 ISO P0
finish/coating:	Uncoated
Outer Race Width	1.575 Inch 40 Millimeter
Inner Race Width	0 Inch 0 Millimeter
Outside Diameter	8.465 Inch 215 Millimeter
Long Description	120MM Bore; 215MM Outside Diameter; 40MM Outer Race Width; 2 Metal Shields; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; St
Manufacturer URL	http://www.ntnamerica.com
Weight / Kilogram	0
outer ring width:	40 mm
Manufacturer Name	NTN
bearing material:	High Carbon Chrome Steel
inner ring width:	40 mm
outside diameter:	215 mm
precision rating:	ISO Class 0
Internal Clearance	C0-Medium
Bore Diameter (mm)	120

Outer Diameter (mm)	215
internal clearance:	CN
snap ring included:	Without Snap Ring
Minimum Buy Quantity	N/A
row type & fill slot:	Single Row Non-Fill Slot
maximum rpm (grease):	2900 rpm
static load capacity:	131000 N
Harmonized Tariff Code	8482.10.50.68
dynamic load capacity:	155000 N
Internal Special Features	No
(Grease) Lubrication Speed	2 900 r/min
manufacturer product page:	Click here
operating temperature range:	-40 to 120 °C
Basic static load rating (C0)	131 kN
Basic dynamic load rating (C)	155 kN
Maximum Capacity / Filling Slot	No