


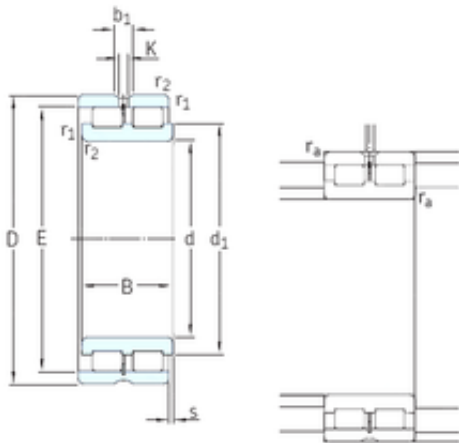

Bearing No. NNCL4844CV

|                               |            |
|-------------------------------|------------|
| S                             | 4 mm       |
| d                             | 220 mm     |
| D                             | 270 mm     |
| B                             | 50 mm      |
| C                             | 50 mm      |
| K                             | 4 mm       |
| E                             | 256,5 mm   |
| d1                            | 239 mm     |
| D1                            | – mm       |
| b1                            | 7 mm       |
| Weight                        | 6,2 Kg     |
| ba min.                       | 227 mm     |
| r4 min.                       | – mm       |
| r3 min.                       | – mm       |
| r2 min.                       | 1,5 mm     |
| r1 min.                       | 1,5 mm     |
| ra max.                       | 1,5 mm     |
| Da max.                       | 263 mm     |
| Size (mm)                     | 220x270x50 |
| Width (mm)                    | 50         |
| Bearing number                | NNCL4844CV |
| Limiting speed                | 1200 r/min |
| Reference speed               | 1000 r/min |
| Bore Diameter (mm)            | 220        |
| Outer Diameter (mm)           | 270        |
| Fatigue load limit (Pu)       | 85         |
| Basic dynamic load rating (C) | 352 kN     |
| Basic static load rating (C0) | 865 kN     |