


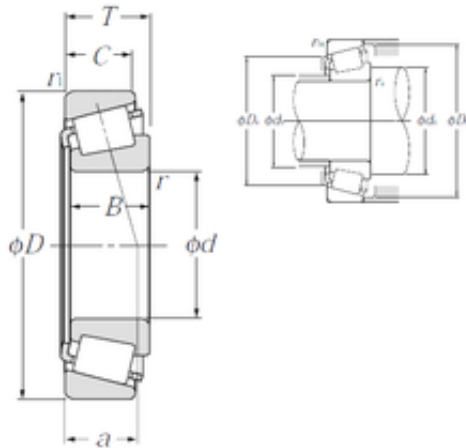

Bearing No. 4T-6379/6320

e	0.32
a	18,8 mm
d	65,088 mm
D	135,755 mm
T	53,975 mm
B	56,007 mm
C	44,45 mm
Y0	1.02
Db	126 mm
da	84 mm
Y2	1.85
d1	98 mm
Da	117 mm
db	77 mm
Mass	3.71 kg
Weight	3,71 Kg
ra max	3.5 mm
ra max.	3,5 mm
r1a max	3.3 mm
ra1 max.	3,3 mm
Category	Roller Bearings
Inventory	0.0
Size (mm)	65.088x135.755x53.975
Width (mm)	53,975
Nlim (oil)	3,800 rpm
Nlim (grease)	2,900 rpm
Product Group	B04334
Bearing number	4T-6379/6320
Dynamic load, C	278 kN
Static load, C0	380 kN

Weight / Kilogram	3.758
Manufacturer Name	NTN
Bore Diameter (mm)	65,088
Outer Diameter (mm)	135,755
Minimum Buy Quantity	N/A
Calculation factor (e)	0,32
Fatigue limit load, Cu	46.3 kN
Calculation factor (Y0)	1,02
(Oil) Lubrication Speed	3 800 r/min
(Grease) Lubrication Speed	2 900 r/min
Rating life coefficient, A2	1.4
Basic static load rating (C0)	380 kN
Basic dynamic load rating (C)	278 kN
Max operating temperature, Tmax	120 °C
Min operating temperature, Tmin	-40 °C
Characteristic cage frequency, FTF	0.42 Hz
Characteristic outer ring frequency, BPF0	6.65 Hz
Characteristic inner ring frequency, BPFI	9.35 Hz
Characteristic rolling element frequency, BSF	5.62 Hz