


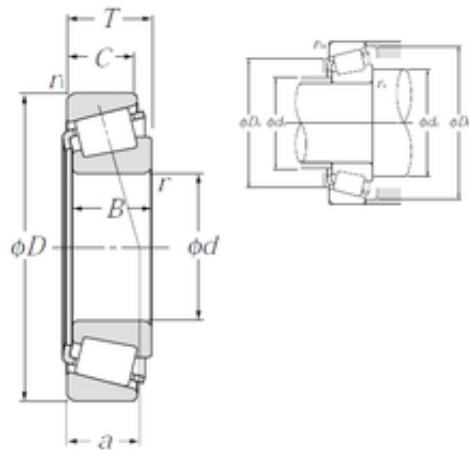

Bearing No. 4T-6386/6320

e	0.32
d	66,675 mm
D	135,755 mm
T	53,975 mm
B	56,007 mm
C	44,45 mm
a	18,8 mm
db	77 mm
Y2	1.85
Y0	1.02
Db	126 mm
da	87 mm
Da	117 mm
d1	98 mm
Mass	3.64 kg
Weight	3,64 Kg
ra max	4.3 mm
ra max.	4,3 mm
r1a max	3.3 mm
ra1 max.	3,3 mm
Size (mm)	66.675x135.755x53.975
Width (mm)	53,975
Nlim (oil)	3,800 rpm
Nlim (grease)	2,900 rpm
Bearing number	4T-6386/6320
Static load, C0	380 kN
Dynamic load, C	278 kN
Bore Diameter (mm)	66,675
Outer Diameter (mm)	135,755
Calculation factor (e)	0,32

Fatigue limit load, Cu	46.3 kN
Calculation factor (Y0)	1,02
(Oil) Lubrication Speed	3 800 r/min
(Grease) Lubrication Speed	2 900 r/min
Rating life coefficient, A2	1.4
Basic dynamic load rating (C)	278 kN
Basic static load rating (C0)	380 kN
Min operating temperature, Tmin	-40 °C
Max operating temperature, Tmax	120 °C
Characteristic cage frequency, FTF	0.42 Hz
Characteristic outer ring frequency, BPF0	6.65 Hz
Characteristic inner ring frequency, BPFI	9.35 Hz
Characteristic rolling element frequency, BSF	5.62 Hz