


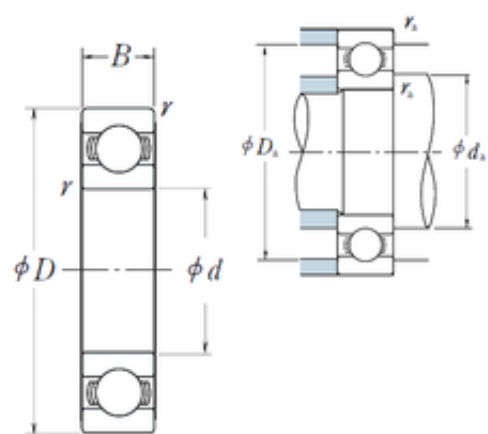

Bearing No. 6228

D	250 mm
d	140 mm
B	42 mm
C	42 mm
r	3
Z_	10
C0	150
ra	2.5
fo	14.9
D_	250
B_	42
DI_	163.25
SRI	16.43
DE_	226.75
DA_	31.75
SRE	16.43
D_a	237
Bore	5.512 Inch 140 Millimeter
SRIX	0.065
Noun	Bearing
yobi	6228
SDM_	195
bomp	0
SRIN	-0.065
mass	7.68
SREX	0.065
SBRG	2
KBRG	6101
SREN	-0.065

ALPHA_	0
UNSPSC	31171504
da max	171,5 mm
LangID	1
r min.	3 mm
C_conv	166000
Weight	7,68 Kg
da min	153
GRS rpm	2200
Oil rpm	2800
hidYobi	6228
da min.	153 mm
Da max.	237 mm
ra max.	2,5 mm
Category	Single Row Ball Bearing
hidTable	ecat_NSRDGB
Inventory	0.0
Snap Ring	No
Size (mm)	140x250x42
Enclosure	Open
bore type:	Round
Prod_Type3	DGBB_SR_OT
Width (mm)	42
Weight / LBS	7.45
maximum rpm:	2800 rpm
Product Group	B00308
closure type:	Open
Cage Material	Steel
Inch - Metric	Metric
Bearing number	6228
bore diameter:	140 mm
cage material:	Steel Cage

overall width:	42 mm
Keyword String	Ball
finish/coating:	Uncoated
Precision Class	ABEC 1 ISO P0
Rolling Element	Ball Bearing
Outer Race Width	1.654 Inch 42 Millimeter
Manufacturer URL	http://www.nskamericas.com
Long Description	140MM Bore; 250MM Outside Diameter; 42MM Outer Race Diameter; Open; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features
Outside Diameter	9.843 Inch 250 Millimeter
Weight / Kilogram	7.45
Manufacturer Name	NSK
precision rating:	ABEC1, P0
outside diameter:	250 mm
Internal Clearance	C0-Medium
Bore Diameter (mm)	140
snap ring included:	Without Snap Ring
Outer Diameter (mm)	250
internal clearance:	C0
Minimum Buy Quantity	N/A
row type & fill slot:	Single Row Non-Fill Slot
dynamic load capacity:	166000 N
Harmonized Tariff Code	8482.10.50.68
(Oil) Lubrication Speed	2 800 r/min
Manufacturer Item Number	6228
Internal Special	No

Features	
(Grease) Lubrication Speed	2 200 r/min
Basic static load rating (C0)	150 kN
Basic dynamic load rating (C)	166 kN
Maximum Capacity / Filling Slot	No