




Bearing No. 6228NR

|                               |             |
|-------------------------------|-------------|
| b                             | 4,5 mm      |
| a                             | 6,,5 mm     |
| f                             | 3,5 mm      |
| d                             | 140 mm      |
| D                             | 250 mm      |
| B                             | 42 mm       |
| C                             | 42 mm       |
| Dx                            | 264 mm      |
| D2                            | 262 mm      |
| D1                            | 242 mm      |
| Cz                            | 3,5 mm      |
| rn                            | 0,5 mm      |
| Cy                            | 9,6 mm      |
| r min.                        | 3 mm        |
| Weight                        | 7,57 Kg     |
| r0 max.                       | 1 mm        |
| da min.                       | 153 mm      |
| Da max.                       | 237 mm      |
| ra max.                       | 2,5 mm      |
| Size (mm)                     | 140x250x42  |
| Width (mm)                    | 42          |
| Bearing number                | 6228NR      |
| Bore Diameter (mm)            | 140         |
| Outer Diameter (mm)           | 250         |
| (Oil) Lubrication Speed       | 2 900 r/min |
| (Grease) Lubrication Speed    | 2 500 r/min |
| Basic dynamic load rating (C) | 166 kN      |
| Basic static load rating (C0) | 150 kN      |

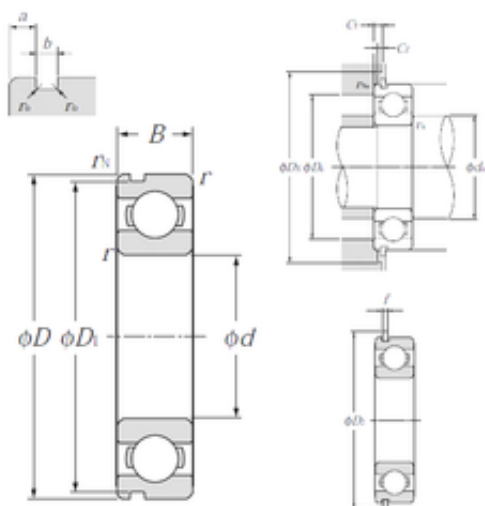