


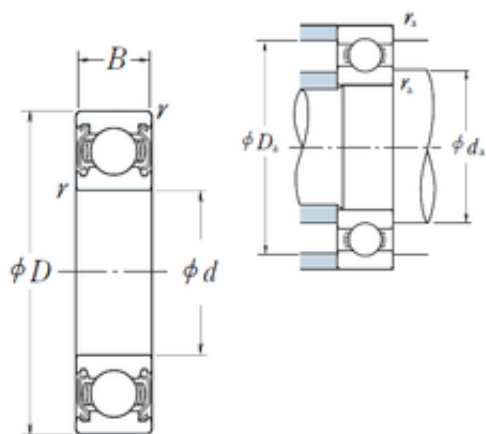

Bearing No. 6228ZZS

|        |         |
|--------|---------|
| r      | 3       |
| d      | 140 mm  |
| D      | 250 mm  |
| B      | 42 mm   |
| C      | 42 mm   |
| fo     | 14.9    |
| ra     | 2.5     |
| D_     | 250     |
| C0     | 150     |
| B_     | 42      |
| Z_     | 10      |
| SRI    | 16.43   |
| DE_    | 226.75  |
| DA_    | 31.75   |
| DI_    | 163.25  |
| SRE    | 16.43   |
| D_a    | 237     |
| SREX   | 0.065   |
| mass   | 7.68    |
| SRIN   | -0.065  |
| bomp   | 0       |
| SREN   | -0.065  |
| yobi   | 6228ZZS |
| SDM_   | 195     |
| KBRG   | 6141    |
| SBRG   | 2       |
| SRIX   | 0.065   |
| C_conv | 166000  |
| ALPHA_ | 0       |
| da min | 153     |
|        |         |

|                               |             |
|-------------------------------|-------------|
| Weight                        | 7,68 Kg     |
| r min.                        | 3 mm        |
| LangID                        | 1           |
| da max                        | 171,5 mm    |
| ra max.                       | 2,5 mm      |
| da min.                       | 153 mm      |
| Da max.                       | 237 mm      |
| GRS rpm                       | 2200        |
| hidYobi                       | 6228ZZS     |
| hidTable                      | ecat_NSRDGB |
| Size (mm)                     | 140x250x42  |
| Prod_Type3                    | DGBB_SR_ZZ  |
| Width (mm)                    | 42          |
| Bearing number                | 6228ZZS     |
| Bore Diameter (mm)            | 140         |
| Outer Diameter (mm)           | 250         |
| (Grease) Lubrication Speed    | 2 200 r/min |
| Basic dynamic load rating (C) | 166 kN      |
| Basic static load rating (C0) | 150 kN      |