


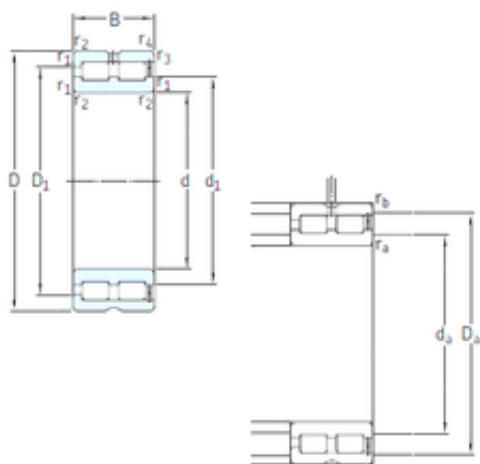

Bearing No. NNCF5044CV

E	312,2 mm
S	9 mm
d	220 mm
D	340 mm
B	160 mm
C	160 mm
K	6 mm
D1	300 mm
b1	8 mm
d1	255 mm
Weight	52,5 Kg
Da max.	327 mm
ba min.	235 mm
r1 min.	3 mm
r4 min.	3 mm
r3 min.	3 mm
r2 min.	3 mm
rb max.	2,5 mm
ra max.	2,5 mm
das rec.	245 mm
Size (mm)	220x340x160
Width (mm)	160
Bearing number	NNCF5044CV
Limiting speed	1100 r/min
Reference speed	850 r/min
Bore Diameter (mm)	220
Outer Diameter (mm)	340
Fatigue load limit (Pu)	375
Basic dynamic load rating (C)	2010 kN

Basic static load rating (C0)	3600 kN
----------------------------------	---------