




Bearing No. NNCF5022CV

|                               |            |
|-------------------------------|------------|
| E                             | 156,7 mm   |
| S                             | 5 mm       |
| d                             | 110 mm     |
| D                             | 170 mm     |
| B                             | 80 mm      |
| C                             | 80 mm      |
| K                             | 3,5 mm     |
| D1                            | 149 mm     |
| b1                            | 6 mm       |
| d1                            | 127 mm     |
| Weight                        | 6,3 Kg     |
| Da max.                       | 161 mm     |
| ba min.                       | 120 mm     |
| r1 min.                       | 2 mm       |
| r4 min.                       | 1 mm       |
| r3 min.                       | 1 mm       |
| r2 min.                       | 2 mm       |
| rb max.                       | 1 mm       |
| ra max.                       | 2 mm       |
| das rec.                      | 124 mm     |
| Size (mm)                     | 110x170x80 |
| Width (mm)                    | 80         |
| Bearing number                | NNCF5022CV |
| Limiting speed                | 2200 r/min |
| Reference speed               | 1800 r/min |
| Bore Diameter (mm)            | 110        |
| Outer Diameter (mm)           | 170        |
| Fatigue load limit (Pu)       | 95         |
| Basic dynamic load rating (C) | 512 kN     |
|                               |            |

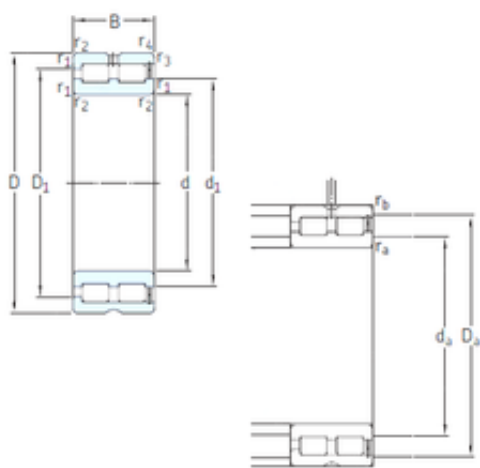

|                                  |        |
|----------------------------------|--------|
| Basic static load rating<br>(C0) | 800 kN |
|----------------------------------|--------|