




Bearing No. NNCF5010CV

E	72,23 mm
S	1,5 mm
d	50 mm
D	80 mm
B	40 mm
C	40 mm
K	3 mm
D1	67,6 mm
b1	4,5 mm
d1	59,1 mm
Weight	0,76 Kg
Da max.	74,8 mm
ba min.	55,5 mm
r1 min.	1 mm
r4 min.	0,3 mm
r3 min.	0,3 mm
r2 min.	1 mm
rb max.	0,3 mm
ra max.	1 mm
das rec.	56,7 mm
Size (mm)	50x80x40
Width (mm)	40
Bearing number	NNCF5010CV
Limiting speed	5000 r/min
Reference speed	4000 r/min
Bore Diameter (mm)	50
Outer Diameter (mm)	80
Fatigue load limit (Pu)	23,6
Basic dynamic load rating (C)	142 kN

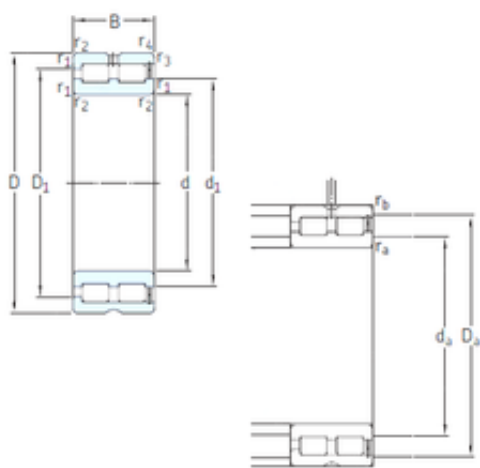

Basic static load rating (C0)	196 kN
----------------------------------	--------