


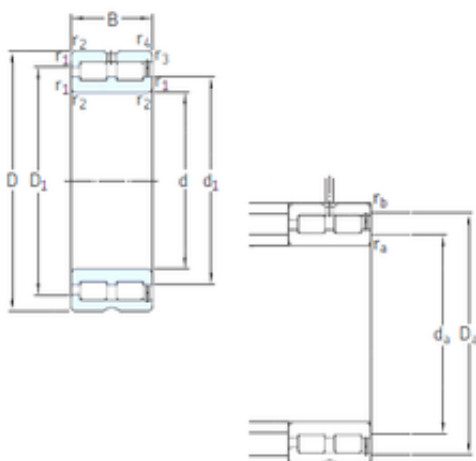

Bearing No. NNCF5012CV

E	86,74 mm
S	1,5 mm
d	60 mm
D	95 mm
B	46 mm
C	46 mm
K	3,5 mm
D1	81,9 mm
b1	4,5 mm
d1	71,7 mm
Weight	1,25 Kg
Da max.	89 mm
ba min.	66 mm
r1 min.	1,1 mm
r4 min.	0,6 mm
r3 min.	0,6 mm
r2 min.	1,1 mm
rb max.	0,5 mm
ra max.	1 mm
das rec.	68,9 mm
Size (mm)	60x95x46
Width (mm)	46
Bearing number	NNCF5012CV
Limiting speed	4000 r/min
Reference speed	3400 r/min
Bore Diameter (mm)	60
Outer Diameter (mm)	95
Fatigue load limit (Pu)	36,5
Basic dynamic load rating (C)	198 kN

Basic static load rating (C0)	300 kN
----------------------------------	--------