


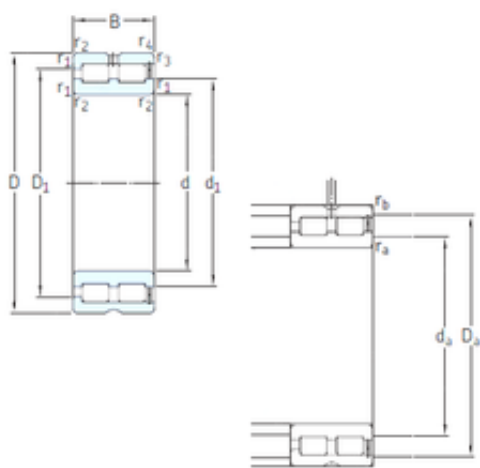

Bearing No. NNCF5004CV

E	36,81 mm
S	1 mm
d	20 mm
D	42 mm
B	30 mm
C	30 mm
K	3 mm
D1	33,2 mm
b1	4,5 mm
d1	28,4 mm
Weight	0,2 Kg
Da max.	38,7 mm
ba min.	23,2 mm
r1 min.	0,6 mm
r4 min.	0,3 mm
r3 min.	0,3 mm
r2 min.	0,6 mm
rb max.	0,3 mm
ra max.	0,5 mm
das rec.	25,6 mm
Size (mm)	20x42x30
Width (mm)	30
Bearing number	NNCF5004CV
Limiting speed	10000 r/min
Reference speed	8500 r/min
Bore Diameter (mm)	20
Outer Diameter (mm)	42
Fatigue load limit (Pu)	6,2
Basic dynamic load rating (C)	52,3 kN

Basic static load rating (C0)	57 kN
----------------------------------	-------