


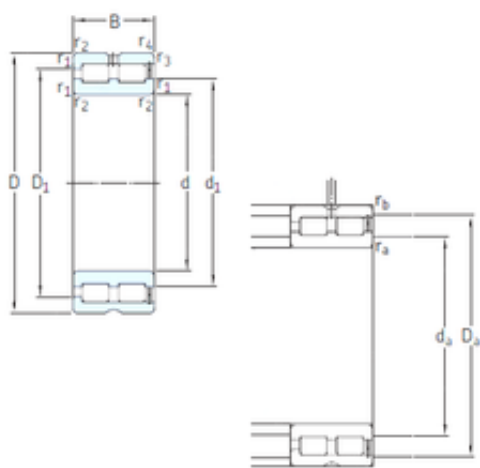

Bearing No. NNCF5005CV

E	42,51 mm
S	1 mm
d	25 mm
D	47 mm
B	30 mm
C	30 mm
K	3 mm
D1	38,9 mm
b1	4,5 mm
d1	34,5 mm
Weight	0,23 Kg
Da max.	43,5 mm
ba min.	28,7 mm
r1 min.	0,6 mm
r4 min.	0,3 mm
r3 min.	0,3 mm
r2 min.	0,6 mm
rb max.	0,3 mm
ra max.	0,5 mm
das rec.	31,5 mm
Size (mm)	25x47x30
Width (mm)	30
Bearing number	NNCF5005CV
Limiting speed	9000 r/min
Reference speed	7000 r/min
Bore Diameter (mm)	25
Outer Diameter (mm)	47
Fatigue load limit (Pu)	7,65
Basic dynamic load rating (C)	59,4 kN

Basic static load rating (C0)	71 kN
----------------------------------	-------