


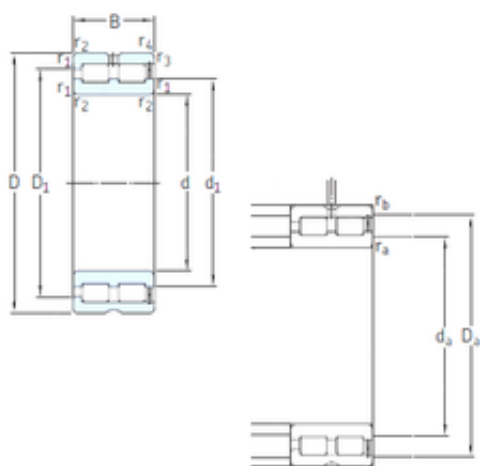

Bearing No. NNCF5006CV

E	49,6 mm
S	1,5 mm
d	30 mm
D	55 mm
B	34 mm
C	34 mm
K	3 mm
D1	45,3 mm
b1	4,5 mm
d1	40 mm
Weight	0,35 Kg
Da max.	50,3 mm
ba min.	34,7 mm
r1 min.	1 mm
r4 min.	0,3 mm
r3 min.	0,3 mm
r2 min.	1 mm
rb max.	0,3 mm
ra max.	1 mm
das rec.	37,8 mm
Size (mm)	30x55x34
Width (mm)	34
Bearing number	NNCF5006CV
Limiting speed	7500 r/min
Reference speed	6000 r/min
Bore Diameter (mm)	30
Outer Diameter (mm)	55
Fatigue load limit (Pu)	10
Basic dynamic load rating (C)	73,7 kN

Basic static load rating (C0)	88 kN
----------------------------------	-------