




Bearing No. NNCF5008CV

E	61,74 mm
S	1,5 mm
d	40 mm
D	68 mm
B	38 mm
C	38 mm
K	3 mm
D1	57,2 mm
b1	4,5 mm
d1	50,5 mm
Weight	0,56 Kg
Da max.	63,3 mm
ba min.	44,8 mm
r1 min.	1 mm
r4 min.	0,3 mm
r3 min.	0,3 mm
r2 min.	1 mm
rb max.	0,3 mm
ra max.	1 mm
das rec.	47,7 mm
Size (mm)	40x68x38
Width (mm)	38
Bearing number	NNCF5008CV
Limiting speed	6000 r/min
Reference speed	4800 r/min
Bore Diameter (mm)	40
Outer Diameter (mm)	68
Fatigue load limit (Pu)	16,3
Basic dynamic load rating (C)	106 kN

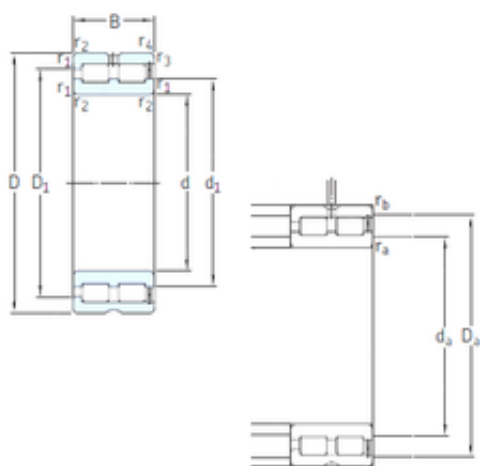

Basic static load rating (C0)	140 kN
----------------------------------	--------