


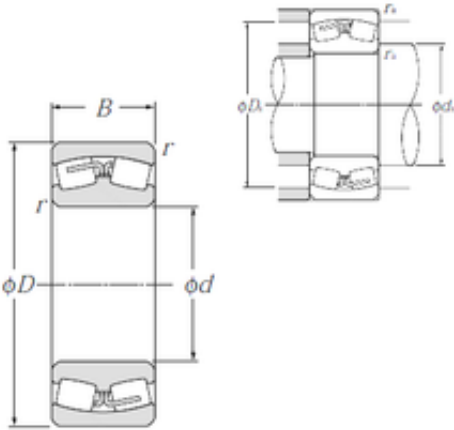

Bearing No. 21315

D	160 mm
d	75 mm
B	37 mm
C	37 mm
Noun	Bearing
Bore	2.953 Inch 75 Millimeter
Width	1.457 Inch 37 Millimeter
UNSPSC	31171510
r min.	2,1 mm
Weight	3,81 Kg
Da max.	148 mm
series:	213
da min.	87 mm
ra max.	2 mm
Category	Spherical Roller Bearing
Inventory	0.0
Enclosure	Open
Size (mm)	75x160x37
cage type:	Machined
Width (mm)	37
bore type:	Straight
Bore Profile	Straight
Weight / LBS	8.31
maximum rpm:	3500 rpm
Inch - Metric	Metric
Product Group	B04311
closure type:	Open
Cage Material	Bronze
Keyword String	Spherical

Withdrawal Nut	Not Applicable
Relubricatable	No
cage material:	Brass
Bearing number	21315
overall width:	37 mm
fillet radius:	2 mm
bore diameter:	75 mm
Rolling Element	Spherical Roller Bearing
Mounting Method	Shaft Mount
finish/coating:	Uncoated
Outside Diameter	6.299 Inch 160 Millimeter
Long Description	75MM Straight Bore; 160MM Outside Diameter; 37MM Width; C0-Medium Clearance; Shaft Mount; Double Row of Spherical Roller Bearings; Bronze Cage Material; Open Enclosure; Not Relubricatable
outer ring type:	Not Split
Manufacturer URL	http://www.ntnamerica.com
bearing material:	Through Hardened Steel
outside diameter:	160 mm
precision rating:	Not Rated
outer ring width:	37 mm
inner ring width:	37 mm
Withdrawal Sleeve	Not Applicable
Weight / Kilogram	3.77
Manufacturer Name	NTN
Bore Diameter (mm)	75
Internal Clearance	C0-Medium
Adapter Part Number	Not Applicable Inch Not

	Applicable Millimeter
Outer Diameter (mm)	160
internal clearance:	CN
Minimum Buy Quantity	N/A
static load capacity:	287000 N
lubrication hole type:	Lubrication Groove & Hole
dynamic load capacity:	239000 N
Calculation factor (e)	0,24
Harmonized Tariff Code	84823080
(Oil) Lubrication Speed	3 500 r/min
Calculation factor (Y0)	2,78
Calculation factor (Y1)	2,84
Number of Rows of Rollers	Double Row
(Grease) Lubrication Speed	2 700 r/min
manufacturer product page:	Click here
operating temperature range:	-40 to 120 °C
Basic static load rating (C0)	287 kN
Basic dynamic load rating (C)	239 kN