




Bearing No. NNCF4912CV

|                               |            |
|-------------------------------|------------|
| E                             | 77,51 mm   |
| S                             | 1 mm       |
| d                             | 60 mm      |
| D                             | 85 mm      |
| B                             | 25 mm      |
| C                             | 25 mm      |
| K                             | 3,5 mm     |
| D1                            | 73,5 mm    |
| b1                            | 4,5 mm     |
| d1                            | 70,5 mm    |
| Weight                        | 0,48 Kg    |
| Da max.                       | 80,5 mm    |
| ba min.                       | 64,7 mm    |
| r1 min.                       | 1 mm       |
| r4 min.                       | 1 mm       |
| r3 min.                       | 1 mm       |
| r2 min.                       | 1 mm       |
| rb max.                       | 1 mm       |
| ra max.                       | 1 mm       |
| das rec.                      | 67,6 mm    |
| Size (mm)                     | 60x85x25   |
| Width (mm)                    | 25         |
| Bearing number                | NNCF4912CV |
| Limiting speed                | 4500 r/min |
| Reference speed               | 3600 r/min |
| Bore Diameter (mm)            | 60         |
| Outer Diameter (mm)           | 85         |
| Fatigue load limit (Pu)       | 14,3       |
| Basic dynamic load rating (C) | 78,1 kN    |
|                               |            |

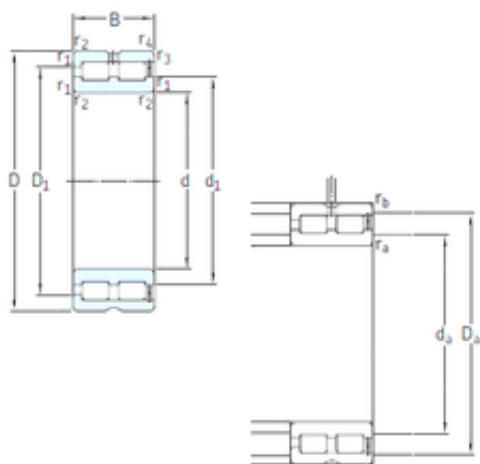

|                                  |        |
|----------------------------------|--------|
| Basic static load rating<br>(C0) | 137 kN |
|----------------------------------|--------|