




Bearing No. NNCF4916CV

E	100,78 mm
S	1 mm
d	80 mm
D	110 mm
B	30 mm
C	30 mm
K	3,5 mm
D1	96 mm
b1	5 mm
d1	91,4 mm
Weight	0,87 Kg
Da max.	105 mm
ba min.	84,8 mm
r1 min.	1 mm
r4 min.	1 mm
r3 min.	1 mm
r2 min.	1 mm
rb max.	1 mm
ra max.	1 mm
das rec.	88 mm
Size (mm)	80x110x30
Width (mm)	30
Bearing number	NNCF4916CV
Limiting speed	3400 r/min
Reference speed	2600 r/min
Bore Diameter (mm)	80
Outer Diameter (mm)	110
Fatigue load limit (Pu)	25
Basic dynamic load rating (C)	121 kN

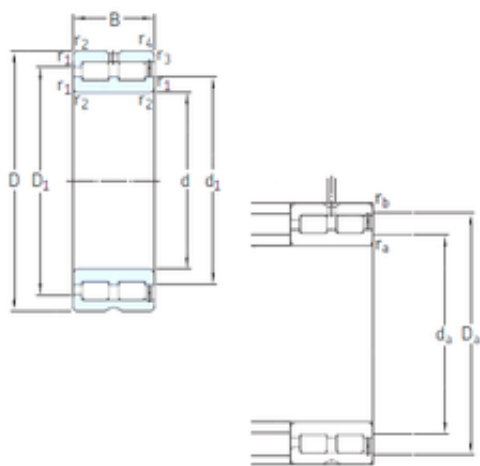

Basic static load rating (C0)	216 kN
----------------------------------	--------