


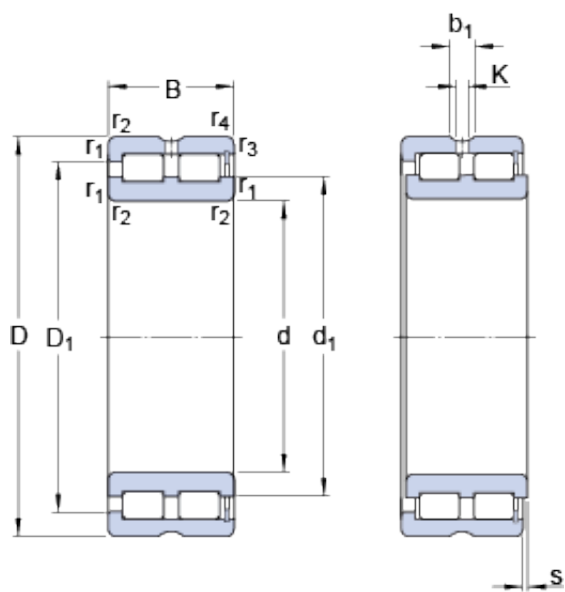

Bearing No. NNCF 4930 CV

D	210 mm
d	150 mm
B	60 mm
K	4 mm
s	4 mm
s max.	4 mm
Size (mm)	210x150x60
Width (mm)	60
Mass bearing	6.55 kg
d ₁	171.5 mm
D ₁	186.5 mm
b ₁	7 mm
b ₁	7 mm
d _{as}	165 mm
Limiting speed	1700 r/min
Bearing number	NNCF 4930 CV
d _{as}	165 mm
Reference speed	1400 r/min
r _b max.	2 mm
r _a max.	2 mm
D _a max.	201 mm
Bore Diameter (mm)	210
d _a min.	159 mm
Outer Diameter (mm)	150
d _a - min.	159 mm
r _b - max.	2 mm
r _a - max.	2 mm
D _a - max.	201 mm
r _{1,2} min.	2 mm

$r_{3,4}$ min.	2 mm
d_1 ?	171.5 mm
D_1 ?	186.5 mm
$r_{3,4}$ - min.	2 mm
$r_{1,2}$ - min.	2 mm
Basic dynamic load rating C	429 kN
Basic dynamic load rating - C	429 kN
Fatigue load limit P_u	91.5 kN
Calculation factor k_r	0.25
Calculation factor - k_r	0.25
Fatigue load limit - P_u	91.5 kN
Basic static load rating C_0	830 kN
Basic static load rating - C_0	830 kN