


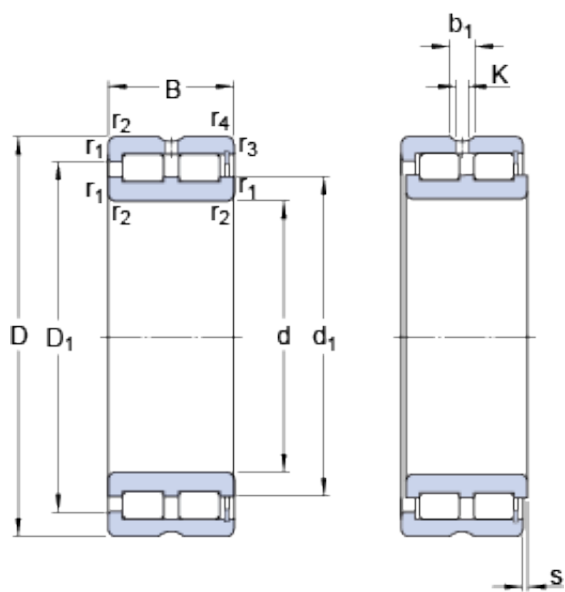

Bearing No. NNCF 5016 CV

D	125 mm
d	80 mm
B	60 mm
K	3.5 mm
s	3.5 mm
s max.	3.5 mm
Size (mm)	125x80x60
Width (mm)	60
Mass bearing	2.59 kg
d ₁	95 mm
D ₁	111 mm
b ₁	5 mm
b ₁	5 mm
d _{as}	91 mm
Limiting speed	3000 r/min
Bearing number	NNCF 5016 CV
d _{as}	91 mm
Reference speed	2400 r/min
r _b max.	0.5 mm
r _a max.	1 mm
D _a max.	119 mm
Bore Diameter (mm)	125
d _a min.	86 mm
Outer Diameter (mm)	80
d _a - min.	86 mm
r _b - max.	0.5 mm
r _a - max.	1 mm
D _a - max.	119 mm
r _{1,2} min.	1.1 mm

$r_{3,4}$ min.	0.6 mm
d_1 ?	95 mm
D_1 ?	111 mm
$r_{3,4}$ - min.	0.6 mm
$r_{1,2}$ - min.	1.1 mm
Basic dynamic load rating C	308 kN
Basic dynamic load rating - C	308 kN
Fatigue load limit P_u	58.5 kN
Calculation factor k_r	0.5
Calculation factor - k_r	0.5
Fatigue load limit - P_u	58.5 kN
Basic static load rating C_0	455 kN
Basic static load rating - C_0	455 kN