


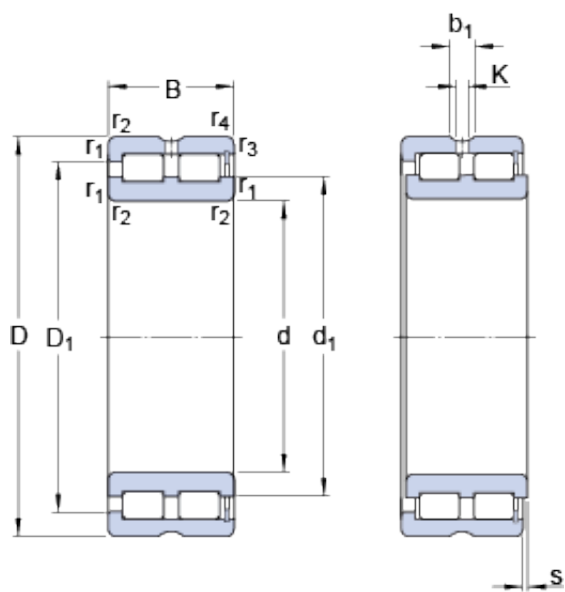

Bearing No. NNCF 5030 CV

D	225 mm
d	150 mm
B	100 mm
K	4 mm
s	6 mm
s max.	6 mm
Size (mm)	225x150x100
Width (mm)	100
Mass bearing	13.3 kg
d ₁	170.5 mm
D ₁	197.5 mm
b ₁	7 mm
b ₁	7 mm
d _{as}	166 mm
Limiting speed	1700 r/min
Bearing number	NNCF 5030 CV
d _{as}	166 mm
Reference speed	1300 r/min
r _b max.	1 mm
r _a max.	2 mm
D _a max.	217 mm
Bore Diameter (mm)	225
d _a min.	160 mm
Outer Diameter (mm)	150
d _a - min.	160 mm
r _b - max.	1 mm
r _a - max.	2 mm
D _a - max.	217 mm
r _{1,2} min.	2 mm

$r_{3,4}$ min.	1.1 mm
d_1 ?	170.5 mm
D_1 ?	197.5 mm
$r_{3,4}$ - min.	1.1 mm
$r_{1,2}$ - min.	2 mm
Basic dynamic load rating C	842 kN
Basic dynamic load rating - C	842 kN
Fatigue load limit P_u	160 kN
Calculation factor k_r	0.5
Calculation factor - k_r	0.5
Fatigue load limit - P_u	160 kN
Basic static load rating C_0	1430 kN
Basic static load rating - C_0	1430 kN