


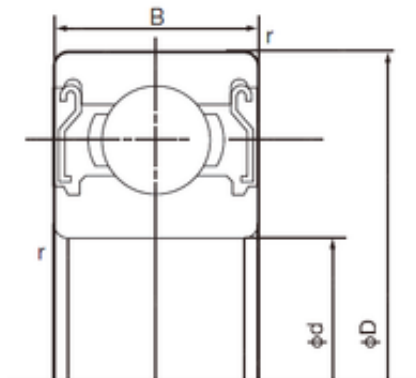

Bearing No. 6232ZZ

D	290 mm
d	160 mm
B	48 mm
C	48 mm
Width	48 mm
Weight	14.3 Kg
r min.	3 mm
da min.	174 mm
ra max.	2.5 mm
Da max.	276 mm
ra (max)	2.5 mm
da (min)	174 mm
Da (max)	276 mm
Factor fo	15.4
Size (mm)	160x290x48
Bore Type	Cylindrical Bore
Enclosure	Double Shield
Bore Size	160 mm
Width (mm)	48
Configuration	Single Row
Bearing number	6232ZZ
Radial Clearance	0.018 to 0.053 mm
Outside Diameter	290 mm
Static Load Rating	186,000 N
Bore Diameter (mm)	160
Dynamic Load Rating	185,000 N
Outer Diameter (mm)	290
Fillet Radius/Chamfer	3 mm
Limiting Speed - Grease	2,100 rpm
Basic dynamic load	185 kN

rating (C)	
Basic static load rating (C0)	186 kN