


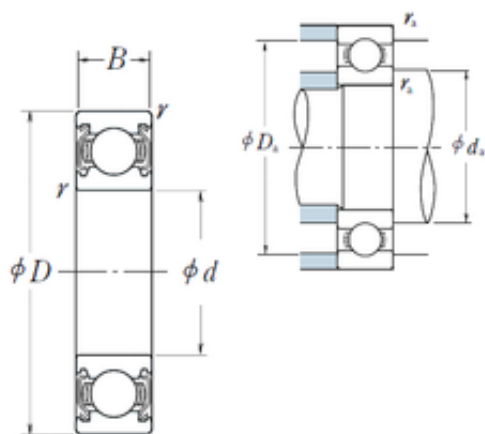

Bearing No. 6232ZZS

r	3
d	160 mm
D	290 mm
B	48 mm
C	48 mm
fo	15.4
ra	2.5
D_	290
C0	186
B_	48
Z_	12
SRI	16.43
DE_	256.75
DA_	31.75
DI_	193.25
SRE	16.43
D_a	277
SREX	0.065
mass	12.8
SRIN	-0.065
bomp	0
SREN	-0.065
yobi	6232ZZS
SDM_	225
KBRG	6141
SBRG	2
SRIX	0.065
C_conv	185000
ALPHA_	0
da min	173

Weight	12,8 Kg
r min.	3 mm
LangID	1
da max	202 mm
ra max.	2,5 mm
da min.	173 mm
Da max.	277 mm
GRS rpm	1900
hidYobi	6232ZZS
hidTable	ecat_NSRDGB
Size (mm)	160x290x48
Prod_Type3	DGBB_SR_ZZ
Width (mm)	48
Bearing number	6232ZZS
Bore Diameter (mm)	160
Outer Diameter (mm)	290
(Grease) Lubrication Speed	1 900 r/min
Basic dynamic load rating (C)	185 kN
Basic static load rating (C0)	186 kN