


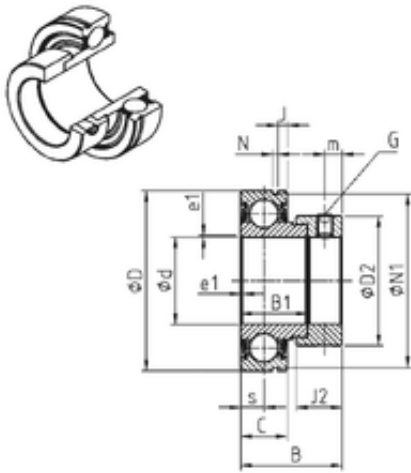

**Bearing No. CES207-23**

|                     |                 |
|---------------------|-----------------|
| N                   | 1,9 mm          |
| e                   | 1,5 mm          |
| G                   | 5/16-24UNF      |
| b                   | 1.9 mm          |
| J                   | 3,18 mm         |
| S                   | 8.5 mm          |
| m                   | 6,5 mm          |
| a                   | 3,96875 mm      |
| s                   | 8,5 mm          |
| C                   | 17 mm           |
| d                   | 36,5125 mm      |
| r                   | 1.5             |
| D                   | 72 mm           |
| B                   | 38,9 mm         |
| D2                  | 55,6 mm         |
| N1                  | 68,81 mm        |
| B1                  | 25,4 mm         |
| J2                  | 17,5 mm         |
| SW                  | 3.97 mm         |
| B2                  | 17.5 mm         |
| d1                  | 55.6 mm         |
| C0                  | 15.2 kN         |
| Weight              | 0,48 Kg         |
| T min.              | -20 °C          |
| T max.              | 100 °C          |
| Size (mm)           | 36.5125x72x38.9 |
| Width (mm)          | 38,9            |
| Bearing number      | CES207-23       |
| Bore Diameter (mm)  | 36,5125         |
| Outer Diameter (mm) | 72              |
|                     |                 |

|                                                   |           |
|---------------------------------------------------|-----------|
| Thread (G) -<br>5/16-24UNF                        | 5/1624UNF |
| Basic dynamic load<br>rating (C)                  | 25,7 kN   |
| Recommended<br>tightening torque for set<br>screw | 8 Nm      |