


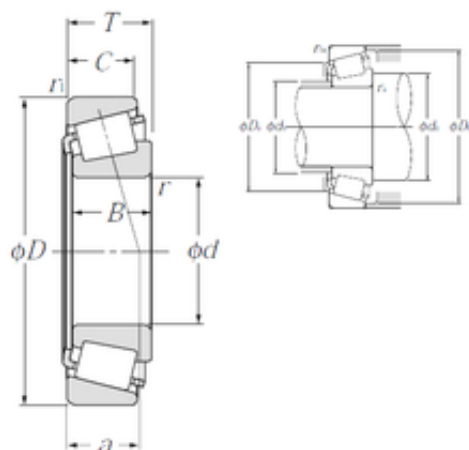

Bearing No. 4T-2879/2820

|                               |                     |
|-------------------------------|---------------------|
| D                             | 73,025 mm           |
| d                             | 31,75 mm            |
| T                             | 22,225 mm           |
| B                             | 23,812 mm           |
| C                             | 17,462 mm           |
| a                             | 5,5 mm              |
| Da                            | 63 mm               |
| da                            | 39,5 mm             |
| Db                            | 68 mm               |
| db                            | 38,5 mm             |
| Weight                        | 0,465 Kg            |
| ra max.                       | 0,8 mm              |
| ra1 max.                      | 3,3 mm              |
| Size (mm)                     | 31.75x73.025x22.225 |
| Width (mm)                    | 22,225              |
| Bearing number                | 4T-2879/2820        |
| Bore Diameter (mm)            | 31,75               |
| Outer Diameter (mm)           | 73,025              |
| Calculation factor (e)        | 0,37                |
| (Oil) Lubrication Speed       | 7 000 r/min         |
| Calculation factor (Y0)       | 0,9                 |
| (Grease) Lubrication Speed    | 5 200 r/min         |
| Basic dynamic load rating (C) | 62,5 kN             |
| Basic static load rating (C0) | 75,5 kN             |