


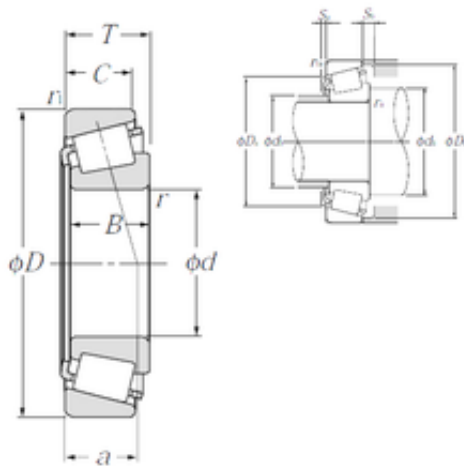

Bearing No. 4T-30304CA

D	52 mm
d	20 mm
T	16,25 mm
B	16 mm
C	12 mm
a	13,5 mm
Sb	4 mm
Sa	3 mm
Da min	39,5 mm
Weight	0,17 Kg
r min.	1,5 mm
da min.	28,5 mm
Db min.	48 mm
db max.	27,5 mm
Da max.	43,5 mm
ra max.	1,5 mm
r1 min.	1,5 mm
ra1 max.	1,5 mm
Size (mm)	20x52x16.25
Width (mm)	16,25
Bearing number	4T-30304CA
Bore Diameter (mm)	20
Outer Diameter (mm)	52
Calculation factor (e)	0,55
(Oil) Lubrication Speed	10 000 r/min
Calculation factor (Y0)	0,6
(Grease) Lubrication Speed	7 600 r/min
Basic dynamic load rating (C)	31 kN
Basic static load rating	31 kN

(C0)	
------	--