


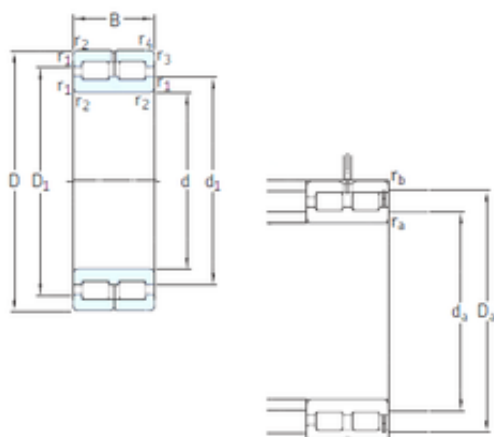

Bearing No. NNC4934CV

|                               |            |
|-------------------------------|------------|
| K                             | 4 mm       |
| d                             | 170 mm     |
| D                             | 230 mm     |
| B                             | 60 mm      |
| C                             | 60 mm      |
| E                             | 215,08 mm  |
| d1                            | 193 mm     |
| b1                            | 7 mm       |
| D1                            | 209 mm     |
| Weight                        | 7,35 Kg    |
| r3 min.                       | – mm       |
| ba min.                       | 180 mm     |
| r4 min.                       | – mm       |
| r2 min.                       | 2 mm       |
| r1 min.                       | 2 mm       |
| ra max.                       | 2 mm       |
| Da max.                       | 220 mm     |
| das rec.                      | 187 mm     |
| Size (mm)                     | 170x230x60 |
| Width (mm)                    | 60         |
| Bearing number                | NNC4934CV  |
| Limiting speed                | 1500 r/min |
| Reference speed               | 1200 r/min |
| Bore Diameter (mm)            | 170        |
| Outer Diameter (mm)           | 230        |
| Fatigue load limit (Pu)       | 100        |
| Basic dynamic load rating (C) | 457 kN     |
| Basic static load rating (C0) | 950 kN     |