


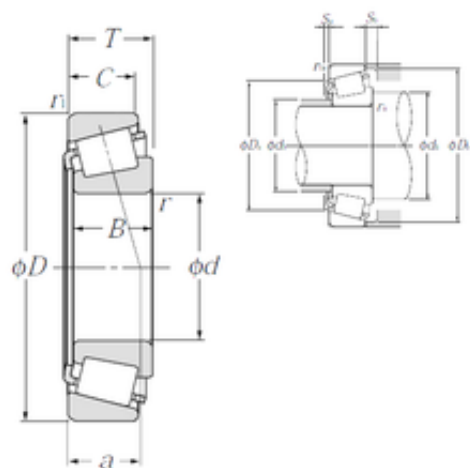

Bearing No. 4T-32306CR

a	23 mm
B	27 mm
C	23 mm
e	0.61
d	30 mm
D	72 mm
T	28,75 mm
Sa	2 mm
Sb	5,5 mm
Y2	0.99
Y0	0.54
Mass	0.59 kg
Weight	0,594 Kg
r min.	1,5 mm
rs min	1.5 mm
db min	37 mm
Da min	57 mm
Da max	63.5 mm
da max	38.5 mm
Db min	67.5 mm
ra max	1.5 mm
r1s min	1.5 mm
Db min.	67,5 mm
r1a max	1.5 mm
ra max.	1,5 mm
Da max.	63,5 mm
da min.	38,5 mm
r1 min.	1,5 mm
db max.	37 mm
ra1 max.	1,5 mm

Category	Bearings
Size (mm)	30x72x28.75
Inventory	0.0
Nlim (oil)	7,300 rpm
Width (mm)	28,75
Product Group	B04334
Nlim (grease)	5,500 rpm
Bearing number	4T-32306CR
Static load, C0	88.5 kN
Dynamic load, C	70 kN
Weight / Kilogram	0.591
Manufacturer Name	NTN
ISO 355 reference	T2FD030
Bore Diameter (mm)	30
Outer Diameter (mm)	72
Minimum Buy Quantity	N/A
Calculation factor (e)	0,61
Fatigue limit load, Cu	10.8 kN
Calculation factor (Y0)	0,54
(Oil) Lubrication Speed	7 300 r/min
(Grease) Lubrication Speed	5 500 r/min
Rating life coefficient, A2	1.4
Basic dynamic load rating (C)	70 kN
Basic static load rating (C0)	88,5 kN
Max operating temperature, Tmax	120 °C
Min operating temperature, Tmin	-40 °C