


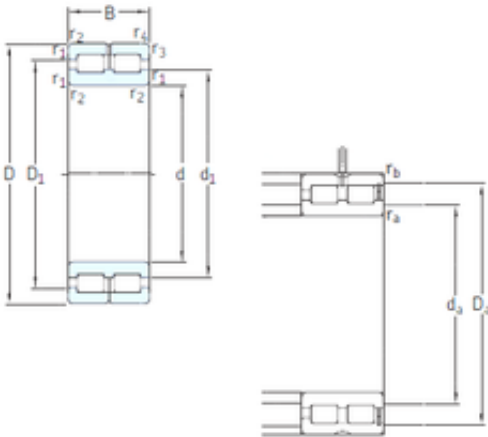

**Bearing No. NNC4914CV**

|                               |            |
|-------------------------------|------------|
| K                             | 3,5 mm     |
| d                             | 70 mm      |
| D                             | 100 mm     |
| B                             | 30 mm      |
| C                             | 30 mm      |
| E                             | 91,87 mm   |
| d1                            | 83 mm      |
| b1                            | 4,5 mm     |
| D1                            | 87 mm      |
| Weight                        | 0,78 Kg    |
| r3 min.                       | – mm       |
| ba min.                       | 75,2 mm    |
| r4 min.                       | – mm       |
| r2 min.                       | 1 mm       |
| r1 min.                       | 1 mm       |
| ra max.                       | 1 mm       |
| Da max.                       | 95 mm      |
| das rec.                      | 79 mm      |
| Size (mm)                     | 70x100x30  |
| Width (mm)                    | 30         |
| Bearing number                | NNC4914CV  |
| Limiting speed                | 3800 r/min |
| Reference speed               | 3000 r/min |
| Bore Diameter (mm)            | 70         |
| Outer Diameter (mm)           | 100        |
| Fatigue load limit (Pu)       | 22,4       |
| Basic dynamic load rating (C) | 114 kN     |
| Basic static load rating (C0) | 193 kN     |