


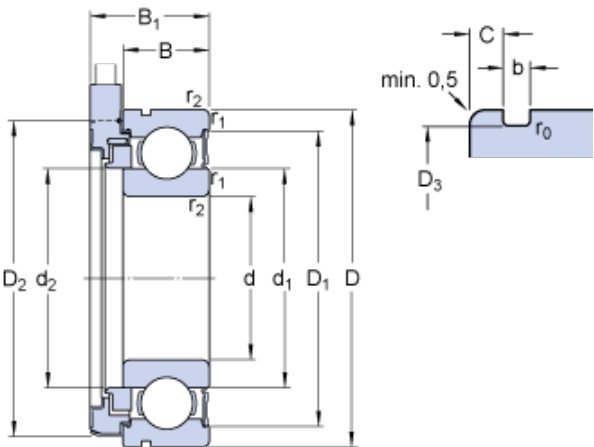

Bearing No. BMB-6202/032S2/UB108A

L	552 mm
d	15 mm
D	35 mm
B	11 mm
C	2.06 mm
b	1.35 mm
Size (mm)	35x15x17.2
Width (mm)	17,2
r ₀	0.4 mm
B ₁	17.2 mm
d ₁	21.7 mm
d ₂	19.5 mm
D ₁	30.4 mm
D ₂	34.46 mm
D ₃	33.17 mm
Limiting speed	13000 r/min
Bearing number	BMB-6202/032S2/UB10 8A
Period accuracy	± 3 %
Mass sensor unit	0.0716 kg
Bore Diameter (mm)	35
Outer Diameter (mm)	15
d _a - min.	19 mm
d _b - min.	19 mm
d _b - max.	19.4 mm
D _a - max.	31 mm
r _a - max.	0.6 mm
Cable connector type	AMP Superseal
r _{1,2} - min.	0.6 mm

Phase shift output signal	90 °
Basic dynamic load rating - C	7.8 kN
Tolerance cable length L - $\pm$	10 mm
Fatigue load limit - P_u	0.16 kN
Calculation factor - k_r	0.025
Calculation factor - f_0	13
Tolerance phase shift output signal	$\pm 30^\circ$
Number of pulses per revolution - N	32
Basic static load rating - C_0	3.8 kN