


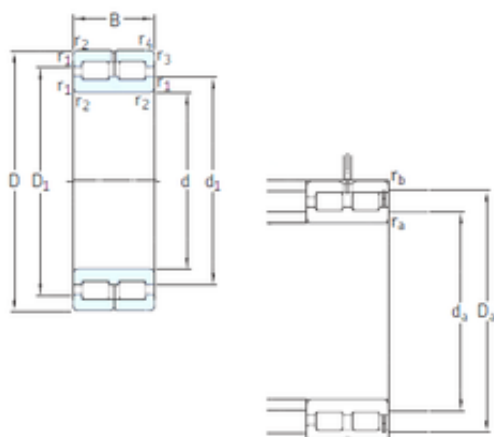

Bearing No. NNC4876CV

|                               |             |
|-------------------------------|-------------|
| K                             | 5 mm        |
| d                             | 380 mm      |
| D                             | 480 mm      |
| B                             | 100 mm      |
| C                             | 100 mm      |
| E                             | 455,8 mm    |
| d1                            | 419 mm      |
| b1                            | 9,4 mm      |
| D1                            | 447 mm      |
| Weight                        | 45,5 Kg     |
| r3 min.                       | – mm        |
| ba min.                       | 391 mm      |
| r4 min.                       | – mm        |
| r2 min.                       | 2,1 mm      |
| r1 min.                       | 2,1 mm      |
| ra max.                       | 2 mm        |
| Da max.                       | 469 mm      |
| das rec.                      | 405 mm      |
| Size (mm)                     | 380x480x100 |
| Width (mm)                    | 100         |
| Bearing number                | NNC4876CV   |
| Limiting speed                | 670 r/min   |
| Reference speed               | 530 r/min   |
| Bore Diameter (mm)            | 380         |
| Outer Diameter (mm)           | 480         |
| Fatigue load limit (Pu)       | 315         |
| Basic dynamic load rating (C) | 1400 kN     |
| Basic static load rating (C0) | 3650 kN     |