


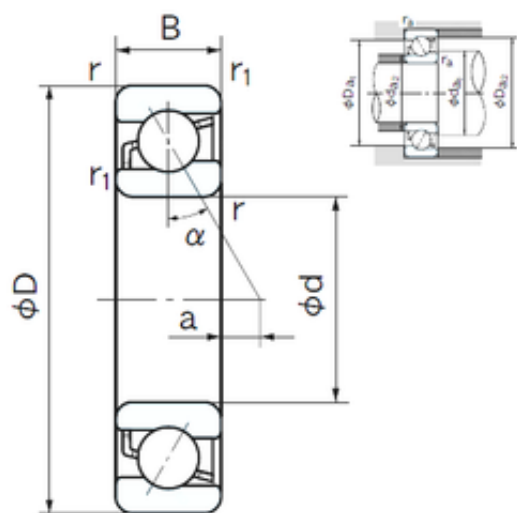

Bearing No. 7238

D	340 mm
d	190 mm
B	55 mm
C	55 mm
a	49.0 mm
r1	1.5 mm
Width	55 mm
Weight	21.5 Kg
r min.	4 mm
ra max.	3 mm
Da max.	322 mm
da min.	208 mm
r1 min.	1.5 mm
ra (max)	3 mm
Da1 (max)	322 mm
Da2 (max)	331 mm
da2 (min)	199 mm
da1 (min)	208 mm
Size (mm)	190x340x55
Enclosure	Open
Bore Type	Cylindrical Bore
Bore Size	190 mm
ra1 (max)	1.5 mm
Width (mm)	55
Configuration	Single Row
Bearing number	7238
Angle (?)	30 °
Outside Diameter	340 mm
Static Load Rating	410,000 N
Bore Diameter (mm)	190

Dynamic Load Rating	315,000 N
Outer Diameter (mm)	340
Limiting Speed - Oil	2,200 rpm
Fillet Radius/Chamfer	4 mm
Limiting Speed - Grease	1,600 rpm
(Grease) Lubrication Speed	1600 r/min
Basic static load rating (C0)	410 kN
Basic dynamic load rating (C)	315 kN