


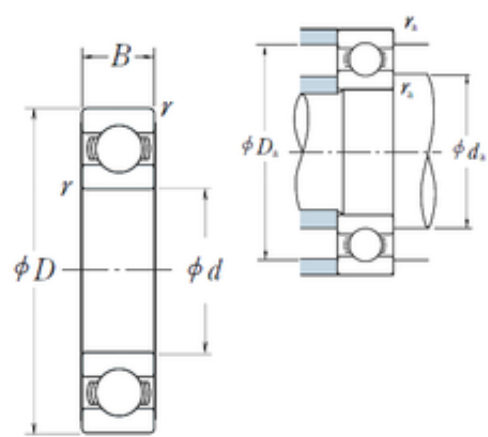

Bearing No. 6244

r	4
d	220 mm
D	400 mm
B	65 mm
C	65 mm
C0	375
Z_	11
ra	3
B_	65
D_	400
fo	15.1
D_a	384
SRE	24.65
DE_	357.625
DA_	47.625
DI_	262.375
SRI	24.65
mass	37.4
SRIN	-0.08
SBRG	2
SRIX	0.08
KBRG	6104
SREN	-0.08
yobi	6244
bomp	0
SREX	0.08
SDM_	310
r min.	4 mm
ALPHA_	0
da min	236

C_conv	310000
Weight	37,4 Kg
LangID	1
Oil rpm	1600
GRS rpm	1300
hidYobi	6244
ra max.	3 mm
Da max.	376 mm
da min.	246 mm
hidTable	ecat_NSRDGB
Size (mm)	220x400x65
Prod_Type3	DGBB_SR_OT
Width (mm)	65
Bearing number	6244
Bore Diameter (mm)	220
Outer Diameter (mm)	400
Basic static load rating (C0)	375 kN
Basic dynamic load rating (C)	310 kN