


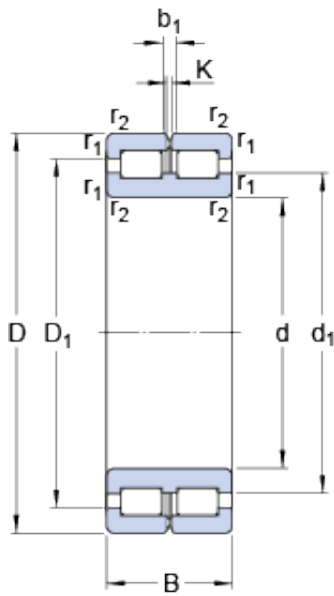

Bearing No. NNC 4860 CV

|                             |             |
|-----------------------------|-------------|
| D                           | 380 mm      |
| d                           | 300 mm      |
| B                           | 80 mm       |
| K                           | 5 mm        |
| Size (mm)                   | 380x300x80  |
| Width (mm)                  | 80          |
| Mass bearing                | 23 kg       |
| b <sub>1</sub>              | 9.4 mm      |
| d <sub>1</sub>              | 330.4 mm    |
| D <sub>1</sub>              | 349 mm      |
| b <sub>1</sub>              | 9.4 mm      |
| d <sub>as</sub>             | 319 mm      |
| Limiting speed              | 850 r/min   |
| Bearing number              | NNC 4860 CV |
| d <sub>as</sub>             | 319 mm      |
| Reference speed             | 700 r/min   |
| r <sub>a</sub> max.         | 2 mm        |
| D <sub>a</sub> max.         | 370 mm      |
| Bore Diameter (mm)          | 380         |
| d <sub>a</sub> min.         | 310 mm      |
| Outer Diameter (mm)         | 300         |
| D <sub>a</sub> - max.       | 370 mm      |
| r <sub>1,2</sub> min.       | 2.1 mm      |
| d <sub>a</sub> - min.       | 310 mm      |
| r <sub>a</sub> - max.       | 2 mm        |
| d <sub>1</sub> ?            | 330 mm      |
| D <sub>1</sub> ?            | 349 mm      |
| r <sub>1,2</sub> - min.     | 2.1 mm      |
| Basic dynamic load rating C | 858 kN      |

|                                  |         |
|----------------------------------|---------|
| Basic dynamic load rating - C    | 858 kN  |
| Fatigue load limit $P_u$         | 196 kN  |
| Calculation factor $k_r$         | 0.2     |
| Calculation factor - $k_r$       | 0.2     |
| Fatigue load limit - $P_u$       | 196 kN  |
| Basic static load rating $C_0$   | 2120 kN |
| Basic static load rating - $C_0$ | 2120 kN |