


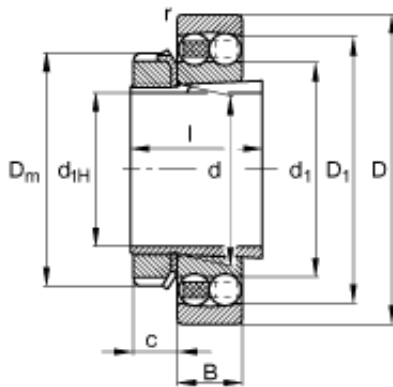

Bearing No. 1218-K-TVH-C3 + H218

	H218 / Adapter sleeve
d	90 mm
m	2,48 kg / Weight
e	0,17
D	160 mm
B	30 mm
l	52 mm
c	18 mm
Size (mm)	80x160x30
Width (mm)	30
m_1	1,21 kg / Weight, adapter sleeve
Y_1	3,74
d_1	112,7 mm
Y_2	5,79
D_m	120 mm
C_r	57000 N / Dynamic load rating (radial)
D_1	138,7 mm
Y_0	3,92
n_G	4500 1/min / Limiting speed
n_B	6600 1/min / Reference speed
C_{0r}	23300 N / Static load rating (radial)
Bearing number	1218-K-TVH-C3 + H218
C_{ur}	1300 N / Fatigue limit load, radial
d_{1H}	80 mm
$r_{a \max}$	2 mm

$d_{b \text{ min}}$	95 mm
$D_{a \text{ max}}$	149 mm
$B_{a \text{ min}}$	6 mm
$d_{a \text{ max}}$	101 mm
Bore Diameter (mm)	80
Outer Diameter (mm)	160